


Cub Cadet
Cub Cadet
Cub Cadet
Cub Cadet
Cub Cadet
Cub Cadet

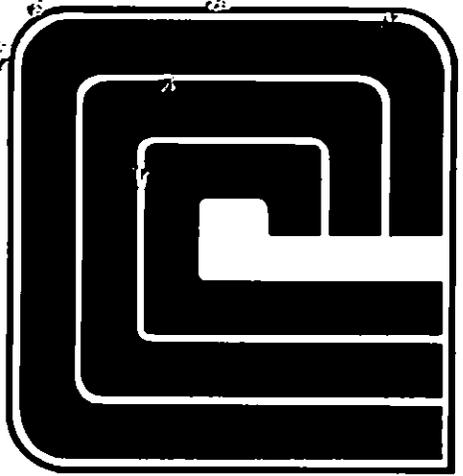

APPROVED ALLIED EQUIPMENT
APPROVED ALLIED EQUIPMENT

ALLIED EQUIPMENT

The allied equipment shown on the following pages has been approved for use on Cub Cadet products. These attachments are made by other manufacturers and are purchased directly from the manufacturer. Each manufacturer is responsible for their own warranty.

INDEX

Sickle Bars	
Haban Mfg.	Page 4, 5
Rear Mounted Rotary Mower	
Haban Mfg.	Page 6
Rear Mounted Flail Mowers	
Haban Mfg.	Page 7
Spike Aerator—Coring Type-Slicing Type Aerators	
Brinly-Hardy Co.	Page 8
Power-Caster Broadcast Spreaders—Reversible 5 Foot Blade	
Brinly-Hardy Co.	Page 9
Thatchers	
Brinly-Hardy Co.	Page 10
Schwartz Loaders	
Schwartz Products	Page 11, 12
Cabs	
Sims Mfg. Co.	Page 13, 14
Turf Conditioner	
Fuerst Brothers, Inc.	Page 15
Gang Reel Mower	
Roxy Bonner	Page 15
Cab Custom Products	
Custom Products of Litchfield, Inc.	Page 16
Vacuums	
Peco Inc.	Page 17
Kwik Tach Loader	
K-W Mfg. Co. Inc.	Page 18
Loader Attachments	
K-W Mfg. Co. Inc.	Page 19
Scoop Tote Attachments	
JRCO Co. Inc.	Page 20
Spreaders	
The Cyclone Seed Co. Inc.	Page 21
Shredder/Grinder/Sprayers	
Amerind-Mac Kissic, Inc.	Page 22
Golf Ball Retriever	
Wittek Golf Range Supply Co.	Page 23
Rotary Sweeper	
Sweepster	Page 24
Spreader/Seeder	
Gandy Co.	Page 25
Sprayer	
H.D. Hudson Mfg. Co.	Page 25
Rakes	
York Rakes	Page 26
Rake Attachments	
York Rakes	Page 27
Trailers	
Agri-Fab Inc.	Page 28
Trailers/Hand Cart (K.D.)	
Agri-Fab Inc.	Page 29
Stake Kit/Lawn Aerator Roller/Sweep	
Agri-Fab Inc.	Page 30, 31
Tiller Attachments	
Agri-Fab Inc.	Page 32
Attachments	
Agri-Fab Inc.	Page 33
Cargo Carriers	
Agri-Fab Inc.	Page 34
Trailer Accessories	
Agri-Fab Inc.	Page 35
Ordering Information	
Agri-Fab Inc.	Page 36




Cub Cadet[®] APPROVED ALLIED EQUIPMENT

The equipment shown on this page is manufactured by Haban Manufacturing Co., 2100 Northwestern Ave., Racine, WI 53404. Telephone (414) 637-8388.

Heavy duty sickle bar mower cuts heavy grass, weeds, brush and trims hedges through 90° cutting arc. Mows 4-ft. swath with belt drive from tractor PTO. Full floating action - vertical adjustment made by hand lever. All steel construction with ball bearing pulleys, high-carbon shear knives. Tractor equipment required: front PTO implement clutch.


MODEL 402-101 SICKLE BAR
for tractor models 580 to 784 (Series 82) and 1210 to 1712.

MODEL 402-013 SICKLE BAR
for all Cub Cadets 1964 to 1979 equipped with a Power Take Off.

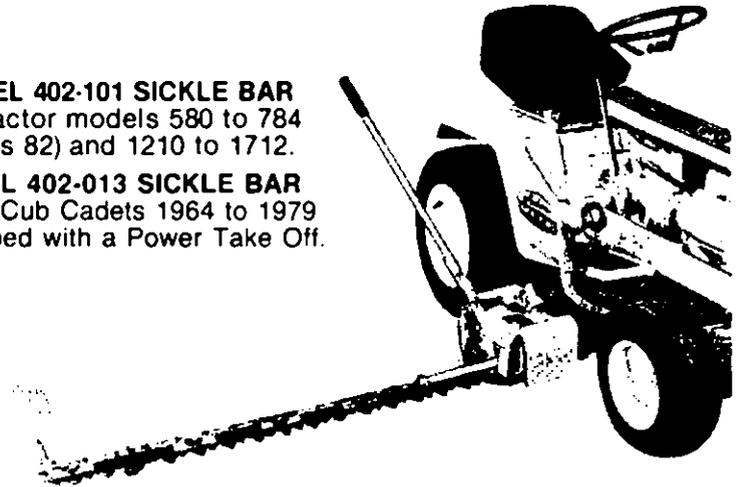

GENERAL SPECIFICATIONS

Cutting Width	Mows 48" swath (122 cent.)
Drive	Belt driven from tractor PTO
Clutch	Tractor PTO
Guards	Non-clogging
Vertical Adjustment	30° below horizontal - 60° vertical-lever controlled
Construction	All-steel, with anti-friction bearings
Suspension	Free-floating, spring suspended
Mounting	Swivel-vibration-dampening
Cutting Speed	900-1100 strokes per minute
Stroke	Full 3" width (7.62 cent.)
Shear Knives	High carbon steel
Transport Position	Pin-locked for transport
Safety	Automatic spring-loaded "Swing Back" device protects against damage from solid objects
Shipping Weight	Average weight 230#

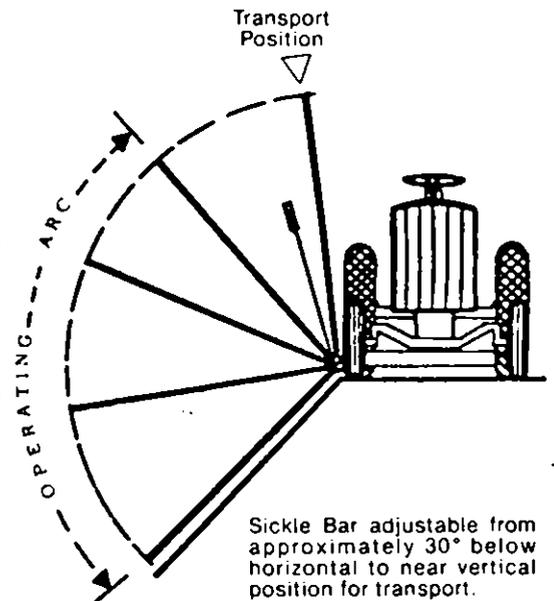

Sickle Bar adjustable from approximately 30° below horizontal to near vertical position for transport.

One year warranty on defective material and workmanship.

Specifications subject to change without notice.



Cub Cadet APPROVED ALLIED EQUIPMENT

The equipment shown on this page is manufactured by Haban Manufacturing Co., 2100 Northwestern Ave., Racine, WI 53404. Telephone (414) 637-8388.

Easy On - Easy Off. The rear mounted Sickle Bar Mower can be mounted to the tractor without heavy lifting in approximately 5 minutes.

Husky Construction describes Haban Sickle Bar Mowers. They are extra strong - and feature a rugged frame and hitch points. Flywheel and pitman drive shafts feature high quality needle bearings. Durable Steel Knife Head and hold down clips combined with heat treated knife sections mean better cutting... at lower costs.


Full-Floating Action allows the cutter to self adjust to ground contour. The bar can be adjusted to mow at any angle from 20° below horizontal to nearly 60° above horizontal. This provides quick adjustment to clear obstructions or inclined road shoulders, and a special pin-lock provides quick security in vertical transport position. Knife cover guard furnished as standard equipment.

Cutting Action features a special type of cutting unit that handles the toughest growth without clogging, and new shear fingers of high carbon steel designed to offer continuous shearing action through the stroke of the knife.

Protection against damage from rocks and other obstructions is provided by a special adjustable spring-tripped automatic "Swing-Back" device which permits the bar to move back upon striking a solid object.

(Specifications and design subject to change without notice)

MODEL 444-200 SICKLE BAR for models 984, 986 and 1914. Tractors must be equipped with category "O" 3 point hitch and rear power take off.

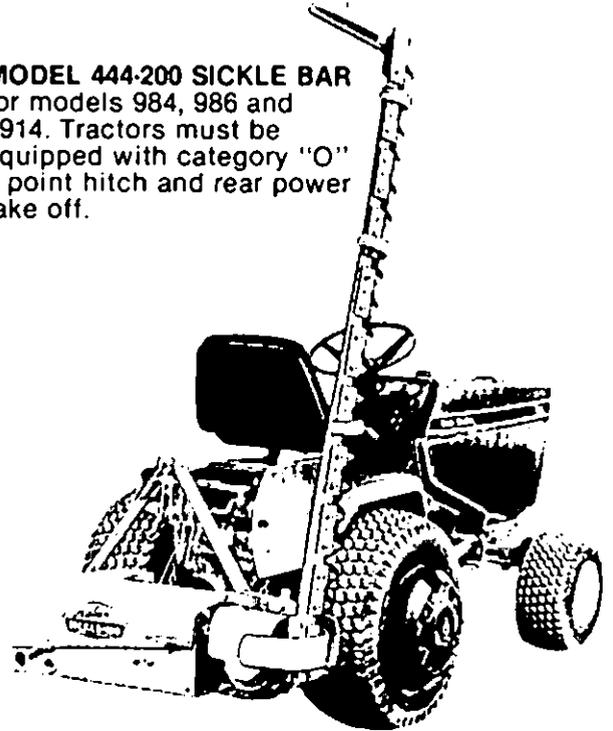

General Specifications

- Cutting Width - 48"
- Mounting - Cat. "O"
- Drive - Driven from Tractor Rear PTO
- Suspension - Free floating, spring suspended
- Mounting - Swivel, vibration - dampened
- Cutting Speed - 900-1100 strokes per minute
- Stroke - 3"
- Guards - Non Clogging
- Mowing Adjustment - 20" below
Horizontal to 60° above
Horizontal, adjustment
made through 3 point
lift control lever.
- Transport Position - Pin-locked for transport.
- Protection - Automatic spring-load "Swing-back"
device from striking solid objects.
- Construction - All steel with anti-friction bearings
- Shipping Weight - 240 lbs.



Cub Cadet APPROVED ALLIED EQUIPMENT


The equipment shown on this page is manufactured by Haban Manufacturing Co., 2100 Northwestern Ave., Racine, WI 53404. Telephone (414) 637-8388.

MODEL 621-503 REAR MOUNTED ROTARY MOWER for models 984, 986 and 1914. Tractor must be equipped with category "O" 3 point hitch and rear power take off.

The high suction blades and anti-windrowing discharge chute give you the cleanest lawn. Balanced skids and wheels on the floating deck minimize scalping and eliminate gauging, to preserve your newest sod or grass seedings.

The hydraulic 3 point hitch and easy wheel height adjustment give you wide control over all types of terrain.

The mower has a shielded PTO drive lines, synchronized gear boxes and forged U-joints. Every part is made of the highest quality material for durability.

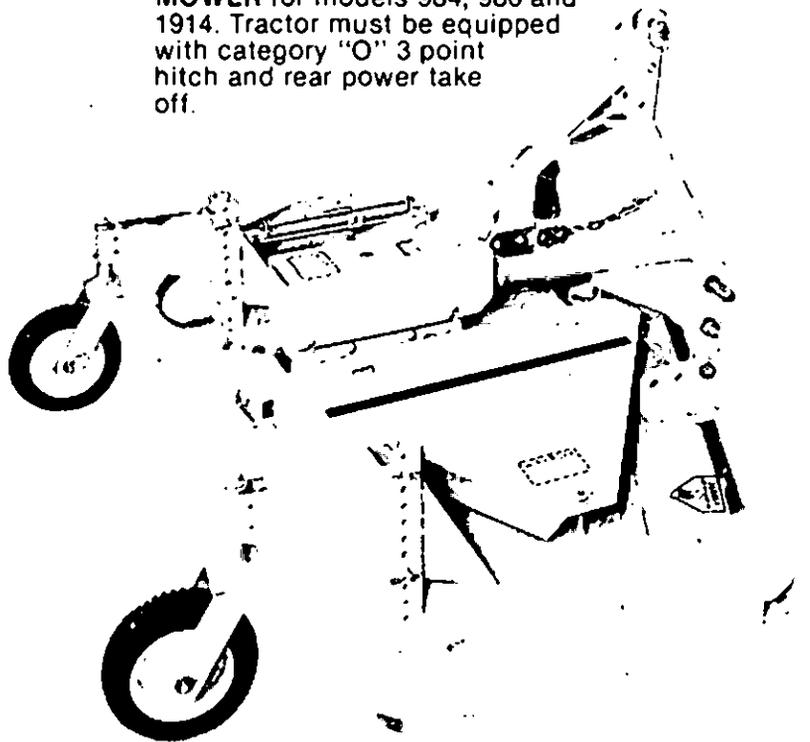

GENERAL SPECIFICATIONS

Overall Length - 39½"

Cutting Width - 54"

Cutting Height - 1½ to 5"

Shipping Weight - 350 lbs.

BLADES - 3 HIGH SUCTION

BLADE TIP SPEED - 17,000 FPM

DRIVE - PTO through synchrone gears and single V-belt.




Cub Cadet APPROVED ALLIED EQUIPMENT

The equipment shown on this page is manufactured by Haban Manufacturing Co., 2100 Northwestern Ave., Racine, WI 53404. Telephone (414) 637-8388.

MODEL 520-200—48" REAR MOUNTED FLAIL MOWER for tractor models 984, 986 and 1914. Tractor must be equipped with category "O" 3 point hitch and rear power take off.

MODEL 522-200—60" REAR MOUNTED FLAIL MOWER for tractor models 984, 986 and 1914. Tractor must be equipped with category "O" 3 point hitch and rear power take off.

Cutting heights from 1½ to 4 inches. Free swinging high carbon knives cut, shred and mow grass or weeds up to 6 feet tall. Full-floating cutting head assembly follows ground contour. V-belt driven rotor assembly. Sealed bearings. Removable inspection cover. Additional equipment required: 15 or more HP; front wheel weights.

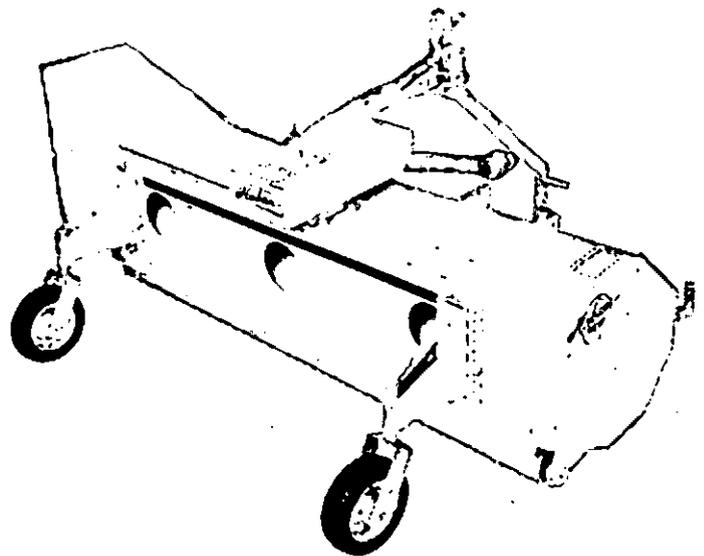




Cub Cadet[®] APPROVED ALLIED EQUIPMENT

The equipment shown on this page is manufactured by Brinly-Hardy Company, 340 East Main Street, Louisville, KY 40202. Telephone (502) 585-3351.

MODEL BB-355 SLICING TYPE

Roll-Aerator for all Cub Cadets of 10 HP or more.


The BB-355 (slicing type) has eight high-carbon, steel reversible knives on each of its six slicer wheel assemblies. The knives slice through the turf spaced approximately 7" from center to center of each penetration. Aerator tines are raised with a lever for transport or when the unit is used as a roller.

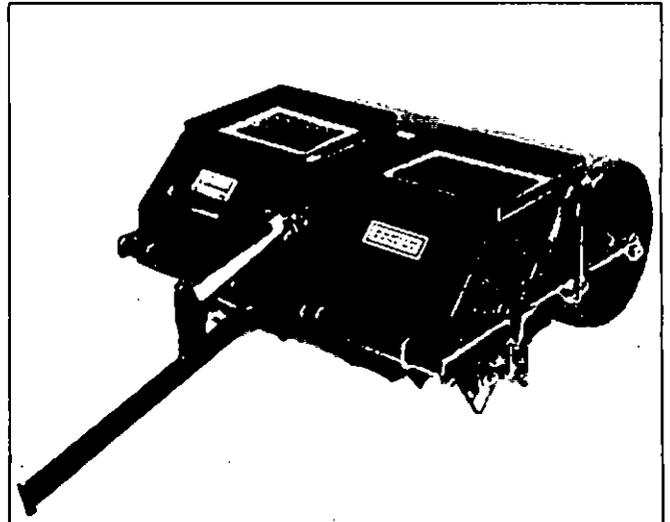

MODEL BB-359 CORING TYPE

Roll-Aerator for all Cub Cadets of 10 HP or more.


The BB-359 (coring type) has six coring-tine wheel assemblies with eight heat-treated 1/2" diameter coring tines per wheel. It lifts out plugs of turf in a ground coring pattern of approximately 7" center to center. Aerator tines are raised with a lever for transport or when the unit is used as a roller.

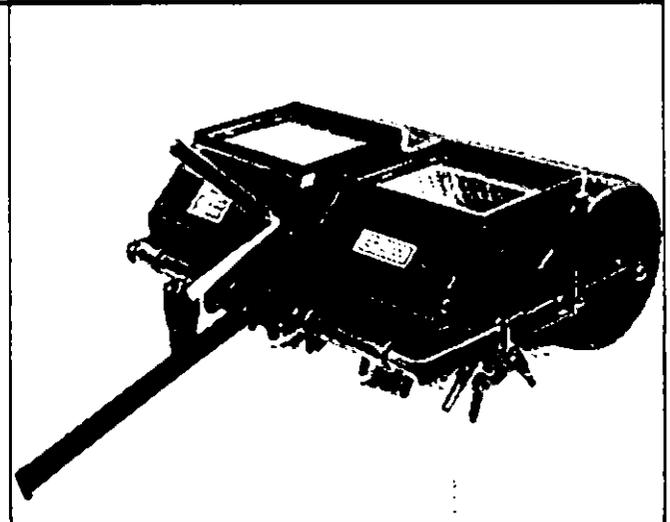

MODEL BB-527 SPIKE AERATOR

for all Cub Cadets 8 HP or more.

Versatile new implement for aerating lawns or rebuilding sparse lawns prior to re-seeding and fertilizing. May also be used for rotary hoe-type cultivation. Features easy two-position adjustment for smooth or aggressive penetration. Periodic use will improve efficiency of fertilizing and seeding programs; increase control of water run off on slopes, and give better soil moisture retention. Spiker-Aerator is 36 inches wide, has 10 tine wheels with a total of 80 spikes. Built-in ballast box will hold four standard concrete blocks, or approximately 160 lbs. for increased soil penetration. Weight, 100 lbs.

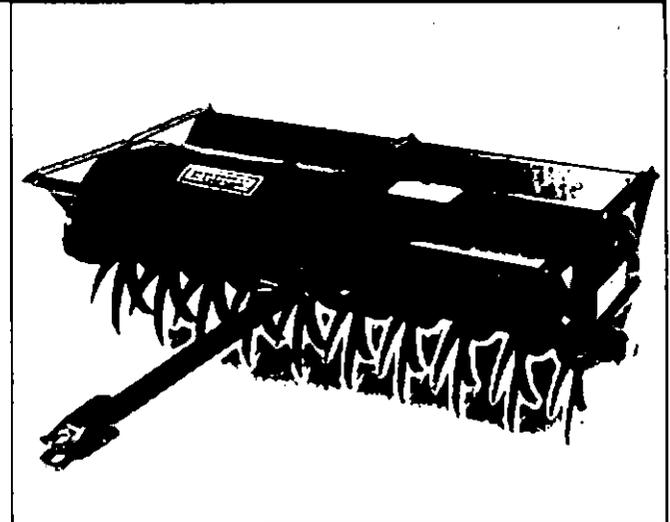




Cub Cadet APPROVED ALLIED EQUIPMENT


The equipment shown on this page is manufactured by Brinly-Hardy Company, 340 East Main Street, Louisville, KY 40202. Telephone (502) 585-3351.

MODEL FF-320 POWER-CASTER BROADCAST SPREADER for all Cadets.

This durable broadcast spreader may be used on any garden tractor or riding mower to spread grass seed, fertilizer or ice melters in a controlled spread pattern up to 20 feet wide or as little as 5 feet wide, depending on material and tractor speed. The FF-320 model is ground driven by the wide turf-saver tires and attaches to the tractor drawbar with a single pin. All working parts are STAINLESS STEEL, and the 1.2 bushel hopper is rust proof poly-ethylene. A single lever operates both the open-close gate and spread centering adjustment, and a calibrated control permits easy adjustment of flow rate. Weight, 60 lbs.

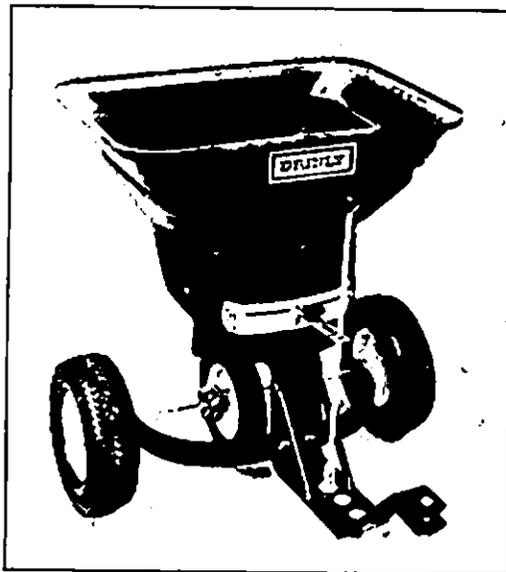

MODEL BB-1010 REVERSIBLE 5 FOOT BLADE for Cub Cadets equipped with category "O" 3 point hitch.

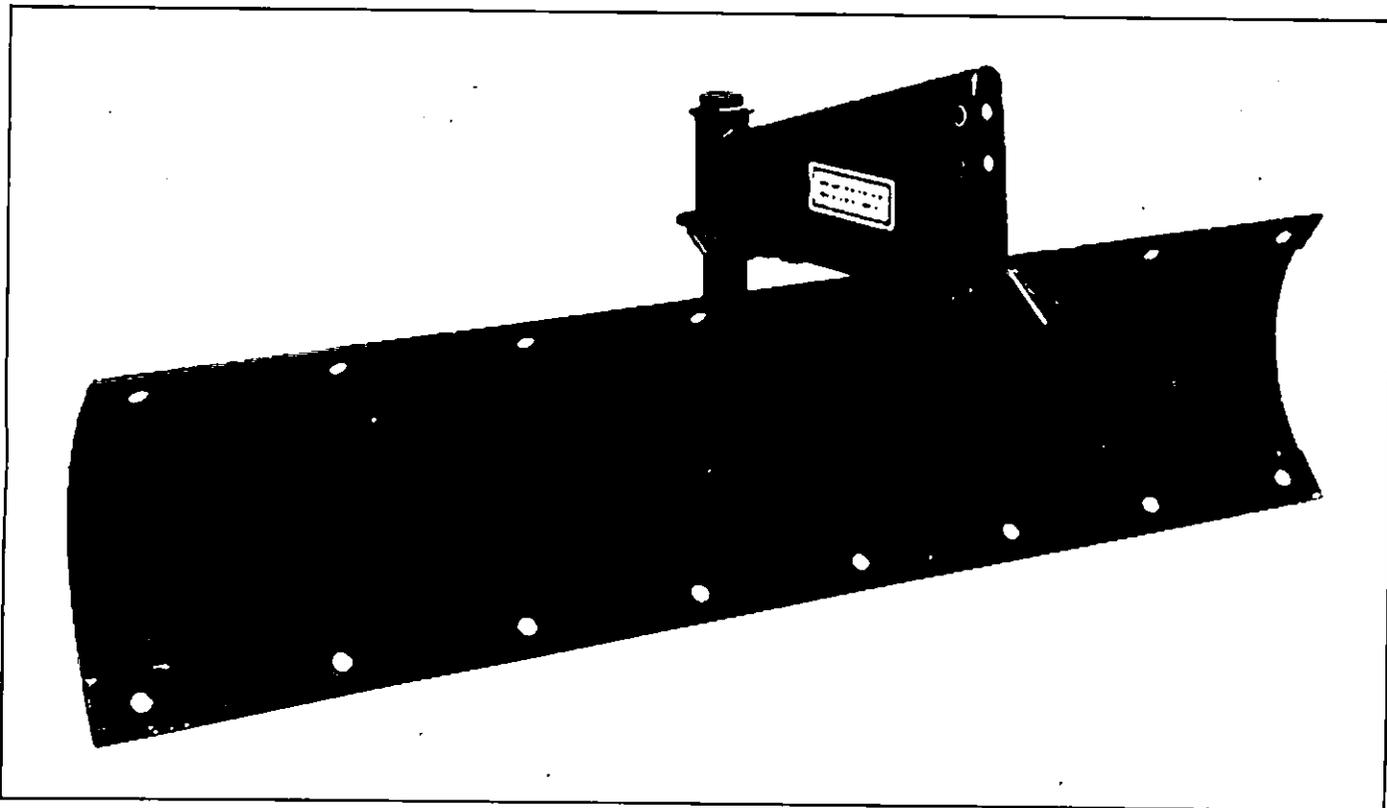

Heavy gauge, 5-foot steel blade may be angled 15° to 30° either side, or reversed. Attaches quickly to 3-point lift hitch; does not require removal of middle or front mounted mower. Ideal for landscaping, leveling, grading and snow removal. Weight, 150 lbs.


BB-1010 60" Reversible Rear Blade




Cub Cadet[®] APPROVED ALLIED EQUIPMENT

The equipment shown on this page is manufactured by Brinly-Hardy Company, 340 East Main Street, Louisville, KY 40202. Telephone (502) 585-3351.

MODEL RR-600 THATCHER
with universal adapter for drawbars on all Cub Cadets.

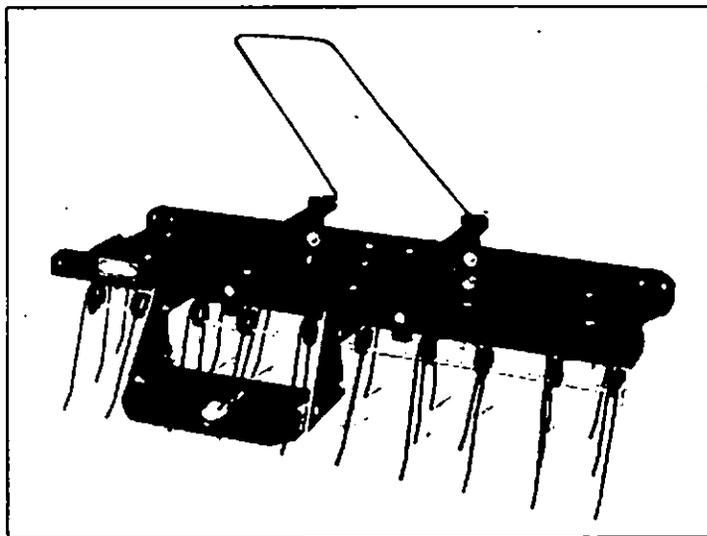

RR-600 Thatcher for Universal Drawbar Adapter

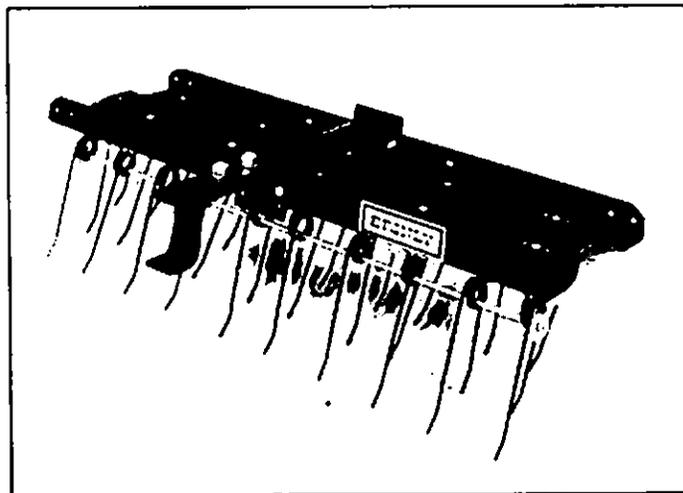

RR-601 Thatcher for Sleeve Hitch

MODEL RR-601 THATCHER
for sleeve hitch. Can be used on tractors with category "O" 3 point hitch with "A" frame adapter Model 19X-924 (Order from Cub Cadet).


The Brinly patented Thatcher quickly cleans lawns of excessive thatch and stimulates plant growth through gentle aeration. Thirty spring tines move at random, creating an overall combing action to flip thatch, matted leaves, twigs and other lawn debris to the top of the grass surface for easy pickup. It eliminates long hours of manual de-thatching and can be used while mowing. The tine tray is designed to carry weight for various turf conditions. The width is 36 inches.



Cub Cadet

APPROVED ALLIED EQUIPMENT

SCHWARTZ LOADERS

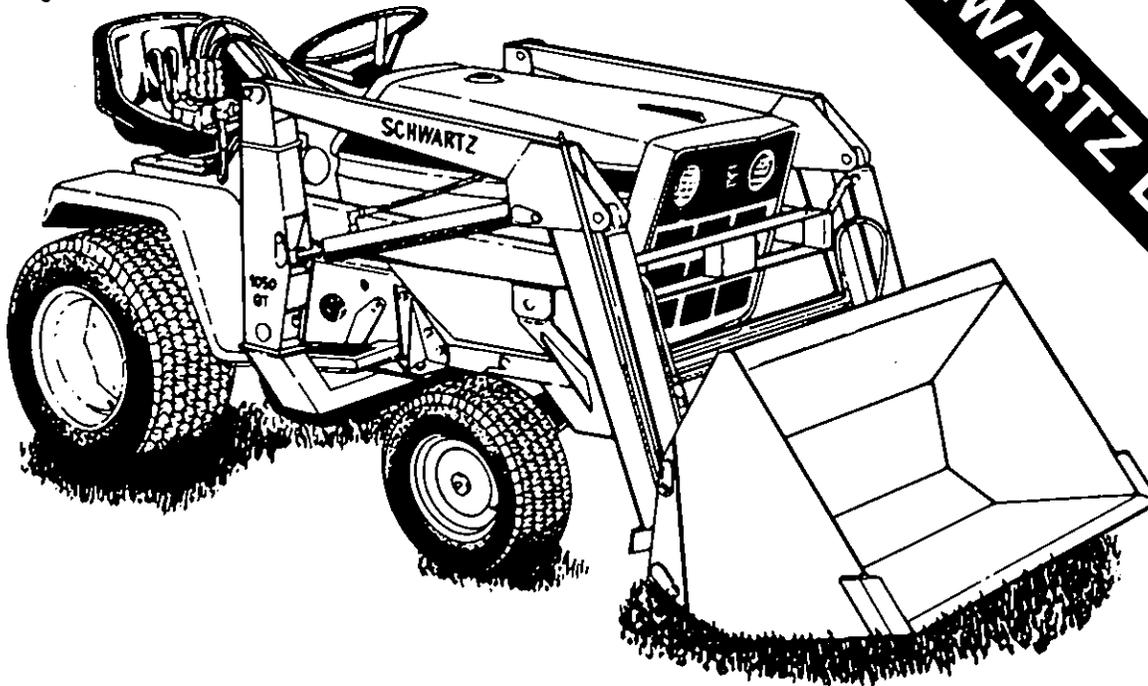

A POWERFUL MATCH FOR CUB CADET TRACTORS

If your customers buy their Cub Cadets to do more than cut grass—show them the new Schwartz 1050 QT Loader.

It's the loader specifically designed to match the Cadet's style. Its low profile and wrap-around frame provides balance, rigidity and better side visibility.

The 1050 QT Loader won't restrict other tractor activities. One person can remove the loader in minutes ...and with hydraulic power, not muscle. Cylinders lift all but the midmounting bracket off the tractor and onto a self-storing parking stand.

For maximum strength without burdensome weight, tapered box-sectioned boom arms and uprights are used. And with the parallelogram cross member, you have a clear view out front, too.

For unrestricted access to the driver's seat, the side frame and upright post is positioned ahead of the console. And you'll find the control levers are easy to reach.

An external pump, with an oil reservoir built into the right-hand frame, ensures smooth responsive action.

You can select a rugged 38- or 48-inch material bucket that lets you put the loader's productive power to work in sand, snow, gravel or dirt.

The Loader is made by Schwartz and approved by the Cub Cadet Corp. It combines the experience and testing of over 40 years of engineering and manufacturing skill. Your customers will appreciate the quality and performance of their new workmates—the Cub Cadet and the Schwartz 1050 QT Loader. See the next page for specifications and ordering information.





Cub Cadet APPROVED ALLIED EQUIPMENT



SCHWARTZ LOADERS

1050 QT Standard Features:

Tapered boom arms and side frames. Side frames, upright posts and boom are constructed of 10 ga. steel. Box section arms. Swing-away front bumper. Reinforced bucket stops. Double acting cylinders with V-pack seals on rod and O-ring backed urethane seals on the piston. 1-inch chrome plated cylinder rods. Plated steel oil lines. Plated hardware. Integral oil reserve for external hydraulic systems. Bucket level indicator. 3/4-inch diameter anti-rotation pins and grease fittings at main pivot points.

Maximum lift height	67½-inches
Clearance when dumped	51-inches
Reach at maximum height	16-inches
Maximum dump angle	43-degrees
Reach when on the ground	43½-inches
Rollback angle	16-inches
Digging depth	3-inches
Overall height	39½-inches
Lift capacity	350 pounds
Breakout force	675 pounds
Raising time	5.5 seconds
Lowering time	4.0 seconds
Hydraulic system	
Flow	3.5 G.P.M.
Pressure	800 P.S.I.

Attachments

Buckets 38-inch or 48-inch material
 Rear weight brackets for tractors with or without 3 pt. hitch (use standard suitcase weights).

Ordering Codes

Basic Loader is partially assembled and packed with mounting kit, valve, pump and hardware in crate suitable for forklift handling and stacking. Order complete Loader, a bucket and ballast box brackets (if tractor not equipped).

For Cub Cadet models 482 to 882 and 1210 to 1712—requires 500 pounds of ballast	Order complete Loader	#9-2990	at	354 lbs.
	It consists of:			
	Basic Loader	#2-4885		224 lbs.
	Valve, Pump & Hardware	#2-4886		33 lbs.
For Cub Cadet models 982, 984, 986, 1912 and 1914—requires 400 pounds of ballast	Order complete Loader	#9-2991		364 lbs.
	It consists of:			
	Basic Loader	#2-4885		224 lbs.
	Valve, Pump & Hardware	#2-4886		33 lbs.
	Mounting Kit	#2-4888		107 lbs.

Attachments

Buckets:				
38" material bucket	#2-4889	at		119
48" material bucket	#2-4890			131
Rear Ballast Weight Brackets*				
Cat. 0 3 pt. hitch mounted	#2-4891			14
Bolt-on style for tractors without 3 pt. hitch	#2-4892			21

*Tractor models 482-782 require 500 pounds ballast
 Model 982 requires 400 pounds ballast.

Specifications subject to change without notice.

For more information call: **Schwartz Products**
 129 Pine Street South
 Lester Prairie, MN
 612-395-2541



Cub Cadet

APPROVED ALLIED EQUIPMENT



CAB-SIMS

For models 482 thru 982 and 1210 to 1914. Cab is fabricated from 12 and 14 gauge steel with nylon-reinforced vinyl side and rear curtains and safety glass windshield equipped with an electric wiper. Curtains may be rolled up or removed. Engine accessible at all times. Order Standard Cab, give year and model.



Manufactured by Sims Manufacturing Company, Inc., East Main Street, Rutland, Massachusetts 01543. Toll Free Watts (800) 225-7290. Within Mass. (617) 886-6115.

Cub Cadet APPROVED ALLIED EQUIPMENT

ALL STEEL CAB-SIMS

For tractor model 982, 984, 986, 1912 and 1914. Heavy-duty welded construction, Safety glass windows, Acoustical roof insulation, electric windshield wiper, removable pin-hinged doors, key-locking door handles, outside fuel filling, floor mat, windshield pivots for easy engine access, all mounting hardware.

OPTIONS:

Interior light, rear wiper motor, defroster on roof-mounted flasher, seat belt.




SPECIFICATIONS

Cab width: 37 inches, Cub height: 57 inches, overall height (mounted): 73 inches

Manufactured by Sims Manufacturing Company, Inc., East Main Street, Rutland, Massachusetts 01543. Toll Free Watts line (800) 225-7290. Within Mass. (617) 886-6115.

CAB-CUSTOM PRODUCTS FOR MODELS 482 TO 784 AND 1210 TO 1712

Operate your Cub Cadet in year-round comfort with an all-steel, all-weather Cozy Cab from Custom Products. Cozy Cabs snug cab-to-tractor fit and quality vinyl padded interior helps take the chill out of snowblowing and other cold weather jobs. In warm weather, Cozy's removable doors and front windshield gives you a shaded, comfortable working environment. Cozy Cabs fit easily with a snowblower, belly-mount mower and other attachments. Shipped fully assembled for quick, easy installation.

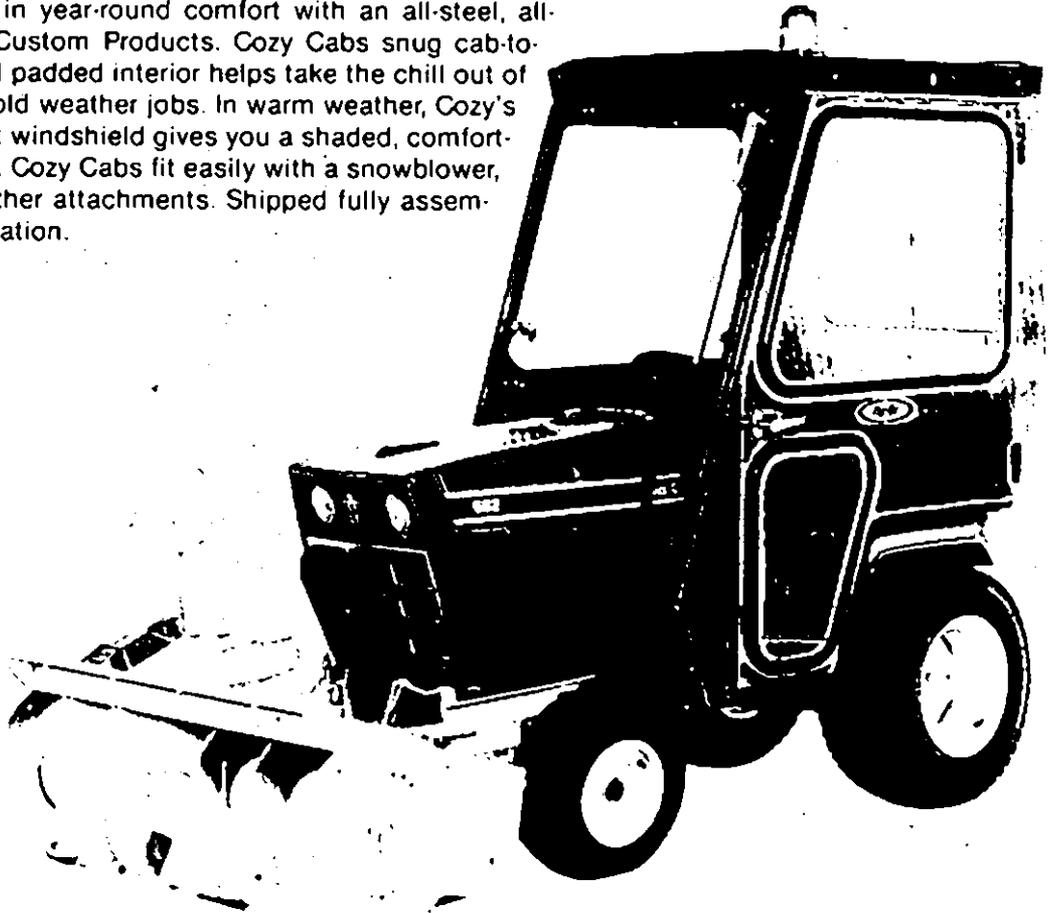

STANDARD FEATURES

- All-steel cab construction
- Shipped fully assembled
- Removable tinted Lexan® windshield
- Tinted safety glass windows
- Sliding rear window
- Removable doors
- Outside fuel filling
- Vinyl padded interior
- Rubber floor mat
- Lifting ears

OPTIONAL EQUIPMENT

- Roof-mounted flasher
- Electric windshield wiper
- Rubber-bladed defroster fan

SPECIFICATIONS

- Height 56"
- Width 32"
- Length 54"
- Weight 300 lbs. (approximate)

Ordering information: Please specify tractor model, year and color. Specify any attachments to be used when cab is mounted. Call or write -


Custom Products of Litchfield, Inc.
Box 718
Litchfield, MN 55355
Ph: 612-693-3221



Cub Cadet APPROVED ALLIED EQUIPMENT

Peco Vacuums pick up clippings, leaves, thatch and unsightly debris. Available in engine driven or PTO driven models. Write for full line catalog. Give tractor model number, year and deck size.

PeCo Inc.
P.O. Box 1197
100 Airport Rd.
Arden, NC 28704

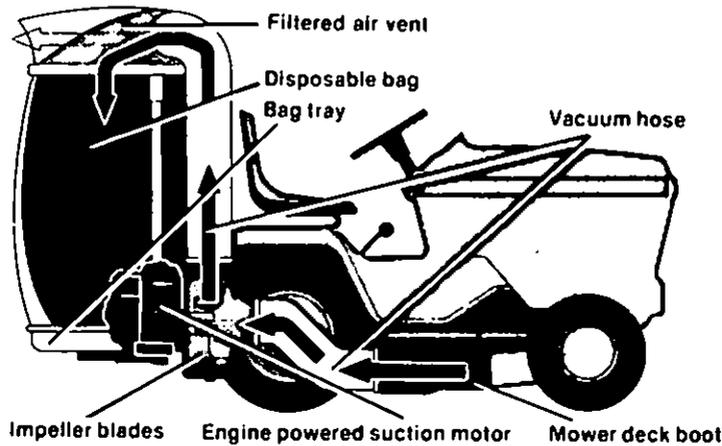

Engine Driven ENGINE DRIVEN UNIT

FEATURES

- Full mower deck suction
- Quick attachment and easy removal
- 3, 4 and 5 H.P. engine options
- Quiet "LOW-TONE" muffler
- High velocity blower
- Mower deck boot & blower housing is a very thick cast aluminum
- Disposable plastic liners
- Less than 30 minute hook-up

SPECIFICATIONS

MODEL PEA-100

55" Height

48" Width

34" Length

12 Bushel Cap.

Standard Tecumseh,

Optional Briggs Engines



Cub Cadet®

Cleveland, Ohio 44136

P.O. Box 36930

216/273-4550

All specifications in this catalog subject to change without prior notice or obligation.



Cub Cadet

APPROVED ALLIED EQUIPMENT

K-W KWIK TACH
LOADER FOR CUB CADET
MODELS 986, 984, 982, 882, 784, 782, 682,
1914, 1912, 1712, 1711, 1710, 1512




- 350 lb. capacity.
- Kwik-Tach feature: 2 pins on uprights, 2 pins on brace arms, 2 bolts on pump mount, 4 pins on subframe and loader is completely off. (It's off and on in less than 10 minutes.)
- Pump comes off with loader unit so there's no hydraulic mess.
- Dual, Double acting lift and bucket cylinder.
- Fluid reservoir in loader upright.
- Completely Hydraulic-compact, easy to mount pump.
- Quick, responsive control. Easy-to-reach control valve with float position.
- Uses include farms, parks, motels, elevators, estates, nurseries, industrial plants and contractors.


K-W MANUFACTURING CO., INC.

800 South Marion Road • Sioux Falls, South Dakota 57106 • Telephone (605) 336-6032


ATTACHMENTS AVAILABLE FOR LOADER




FORK LIFT




WHEEL SPACER KIT




REAR END WEIGHT BOX*



MATERIAL BUCKET



TINE FORK




BLADE

LOADER LIFT CAPACITY

LOADER MODEL	WEIGHT CAPACITY
45-02510	350 lbs.

Rear counterweight recommended.
*284 wheel spacer needed with turf tire and chains.

LOADER SPECIFICATIONS

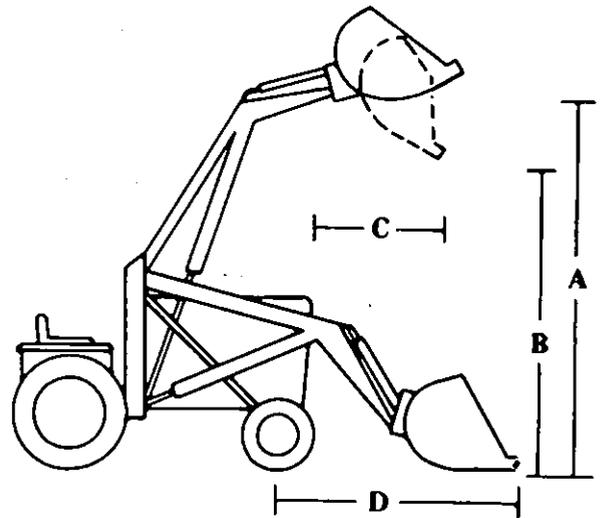


LOADER MODELS	A	B	C	D
45-02510	77"	60"	10"	44"

Dimensions may vary with tractor model and tire type.

KWIK-WAY BACKHOE FACTS

BACKHOE MODEL	51-00110
---------------	----------



Mount Kits
52-02510 — 982, 984, 986



"A" Digging Depth	7.5'
"B" Swing Arc	160°
"C" Loading Height	5'
"D" Reach (from center of swivel mast pivot)	10'3"
"E" Transport Height	67"
"F" Bucket Rotation	140°
Bucket Size	9", 13", 16"
Stabilizer Spread (down)	100"
Stabilizer Spread (up)	56"
Shipping Weight (less bucket and mount)	450 lbs.
Control	Two Lever

Specifications may vary with individual mounts.

KWIK-TACH STEPS (10 minutes or less)

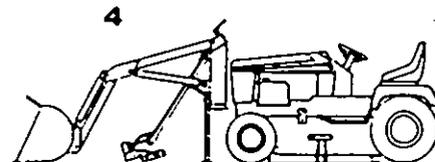

K-W MANUFACTURING CO., INC.

800 S. Marion Rd. • Sioux Falls, S.D. 57106 • Telephone (605) 336-6032

JRCO SCOOP TOTE ATTACHMENT

Model 250 fits the Cub Cadet tractors equipped with the category "O" 3-point hitch. **Model 200IH** fits the Cub Cadet tractors equipped with the sleeve hitch. The sleeve hitch adapter is not needed since the 200IH comes with its own adapter.

SCOOP TOTE attachment is a rear mounted tractor scoop and blade. It handles a variety of jobs: **SCOOP** — digs and scoops dirt, sand, snow, or whatever and lifts it easily with tractor's lift. It is completely operated from tractor seat. **TOTE** — transports heavy loads and dumps, stockpiles or spreads it out. Filled with weights, it gives your tractor added traction. **BLADE** — the bucket locks into a rear blade, when the tractor travels forward or in reverse. From this position, you can backfill, grade or level. Construction: 12 gauge steel bucket, wide cutting bar and heavy-duty frame for strong bucket support. Color: black.

SPECIFICATIONS:	200IH	250
Approx. Shipping Wt.	80 lbs.	95 lbs.
Bucket Width	36 in.	42 in.
Bucket Height	10 in.	10 in.
Bucket Depth	14 in.	16 in.
Approx. Bucket Cap.	2.5 cu. ft.	3 cu. ft.
Approx. Load Cap.	250 lbs.	300 lbs.

SCOOP TOTE has two accessories: Scarifier Bar and Extension Plate.

SCARIFIER BAR

Model 20-R fits the 200IH SCOOP TOTE.

Model 25-R fits the 250 SCOOP TOTE.

The scarifier bar has reversible shovels for breaking ground crust and turning top soil quickly for further digging or seedbed preparation. Rips out roots, weeds and other debris. The removable shovels can be alternated for cultivating between garden rows. Attaches with two clevis pins to scoop's frame.




SPECIFICATIONS	20-R	25-R
Approx. Shipping Wt.	37 lbs.	40 lbs.
Width	36 in.	42 in.
No. of Shovels	Five	Six

EXTENSION PLATE

Model 20-E fits the 200IH SCOOP TOTE. Shipping Wt. 38 lbs.

Model 25-E fits the 250 SCOOP TOTE. Shipping Wt. 42 lbs.

The extension plate increases the hauling surface of the SCOOP TOTE. The plate has a flat bottom design for easy loading and hauling of such items as garbage cans and lawn mower. The 20-E increases the carrying surface of the 200IH to 36 in. x 30 in. The 25-E increases the carrying surface of the 250 to 42 in. x 30 in. Both plates are constructed of 12 gauge steel and attach quickly by hooking inside the bucket without the use of tools.

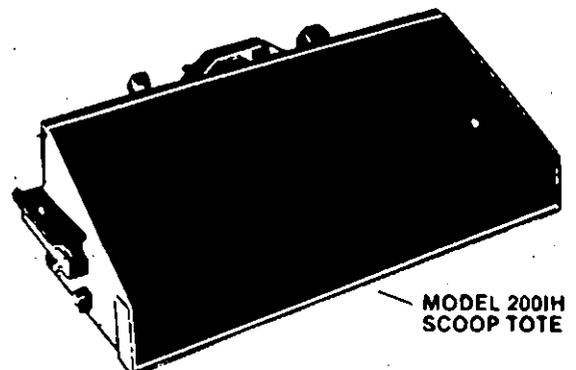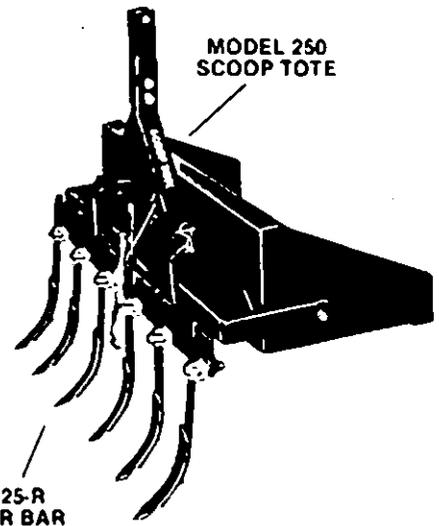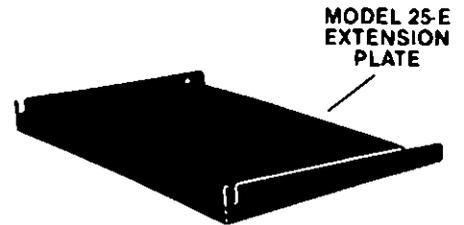

JRCO Co., Inc.

P.O. Box 22733, Minneapolis MN 55422; (612) 535-7200




Cub Cadet
APPROVED ALLIED EQUIPMENT

SPREADERS ON WHEELS - TRACTOR HITCH

SPEED - ACCURACY - FREEDOM FROM STRIPES


Spreads 5' to 8' Wide

Spreads Fertilizer, Seed, Granular Pesticides, Granular Limestone, Ice Melting Compounds & Rock Salt, Soil Conditioners, Etc.

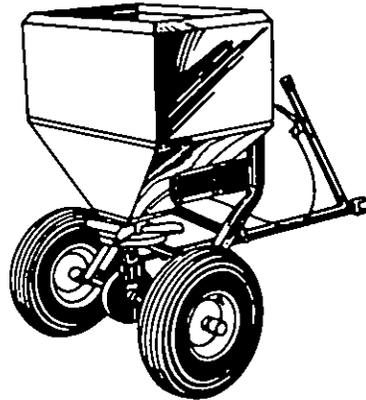


CYCLONE COMMERCIAL SPREADER

Hitch Broadcast Spreader, packed partially assembled; Spread Width/Ft.: 4-10; Capacity Lbs./Cu. In.: 100/3992; Hopper Color: Silver; Type: Stainless Steel; Gear Type: Enclosed die cast; Wheels: 13"x4" pneumatic; Std. Pack: 1; Wt. Pack Lbs.: 44.0; Order No.: 400900; Product No.: 99-84.

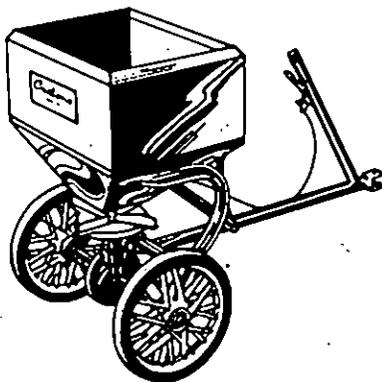

CYCLONE HOMEOWNER SPREADER

Hitch Broadcast Spreader, packed partially assembled; Spread Width/Ft.: 4-10; Capacity Lbs./Cu. In.: 80/2802; Hopper Color: Red baked enamel; Type: Steel; Gear Type: Enclosed die cast; Wheels: 12" spoked plastic; Std. Pack: 1; Wt. Pack Lbs.: 34.0; Order No.: 401000; Product No.: 93-84.

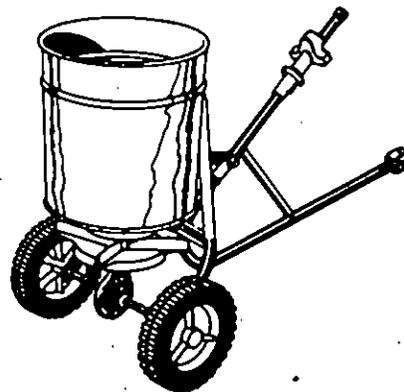

CYCLONE HOMEOWNER SPREADER

Hitch Broadcast Spreader, handle mounted flow control, packed partially assembled; Spread Width/Ft.: 4-8; Capacity Lbs./Cu. In.: 40-60/1271; Hopper Color: Red baked enamel; Type: Steel; Gear Type: Enclosed nylon; Wheels: 8" heavy duty plastic; Std. Pack: 1; Wt. Pack Lbs.: 18.0; Order No.: 401200; Product No.: BP1-84.

ALLEGHENY INTERNATIONAL HARDWARE GROUP

SHIREMANSTOWN, PENNSYLVANIA, U.S.A. 17011 Telephone (717) 737-1500




Cub Cadet

APPROVED ALLIED EQUIPMENT


"Mighty Mac" Sprayer - Amerind-MacKissic Inc.

3 hp Briggs engine powers a 300 psi., 3 gpm piston pump. 22 gallon polyethylene tank, 25 feet of hi-pressure hose and hand gun. Pressure control regulator, stainless line strainer, constant agitation in tank by fluid return line. Optional 4 nozzle spray boom. 50 gallon capacity also available. Order Model No. PS 322T.

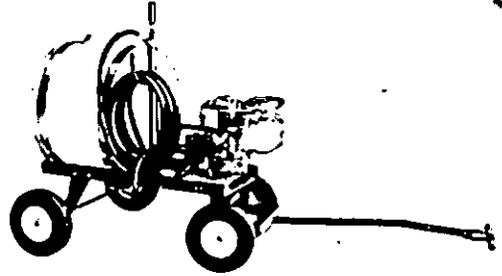


Shredder-Grinder-Chipper-Amerind MacKissic

24 steel knives hammer away at leaves, tree twigs, weeds, plant stalks, even table scraps and wastepaper, pulverizes them to a rich organic mulch. Separate chipper chamber handles limbs up to 3" diameter. Comes with 5 h.p. (Model 12PT-5) or 7 h.p. Order Model 12PT-7.

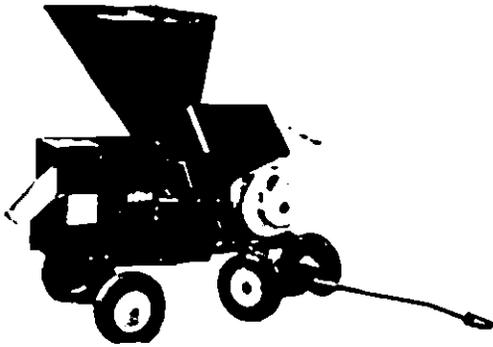

22 Gallon Sprayer-Amerind MacKissic

Mighty Mac 22 gallon sprayer is available in a complete kit, to mount on Cub Cadet garden tractors. Tractor mounted models provide the same excellent sprayer performance by driving the pump off of the tractor engine. Kits are engineered for easy mounting and removal—all brackets and necessary parts are included. Order Model No. CCTS.

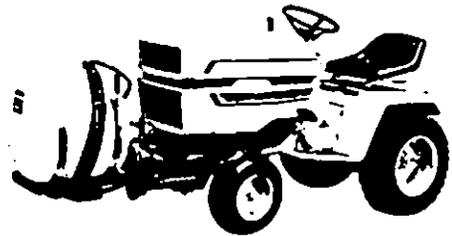


AMERIND-MacKISSIC, INC.
P.O. Box 111, Parker Ford, PA. 19457 • 215-495-7181



Cub Cadet
APPROVED ALLIED EQUIPMENT

GOLF BALL RETRIEVER-WITTEK

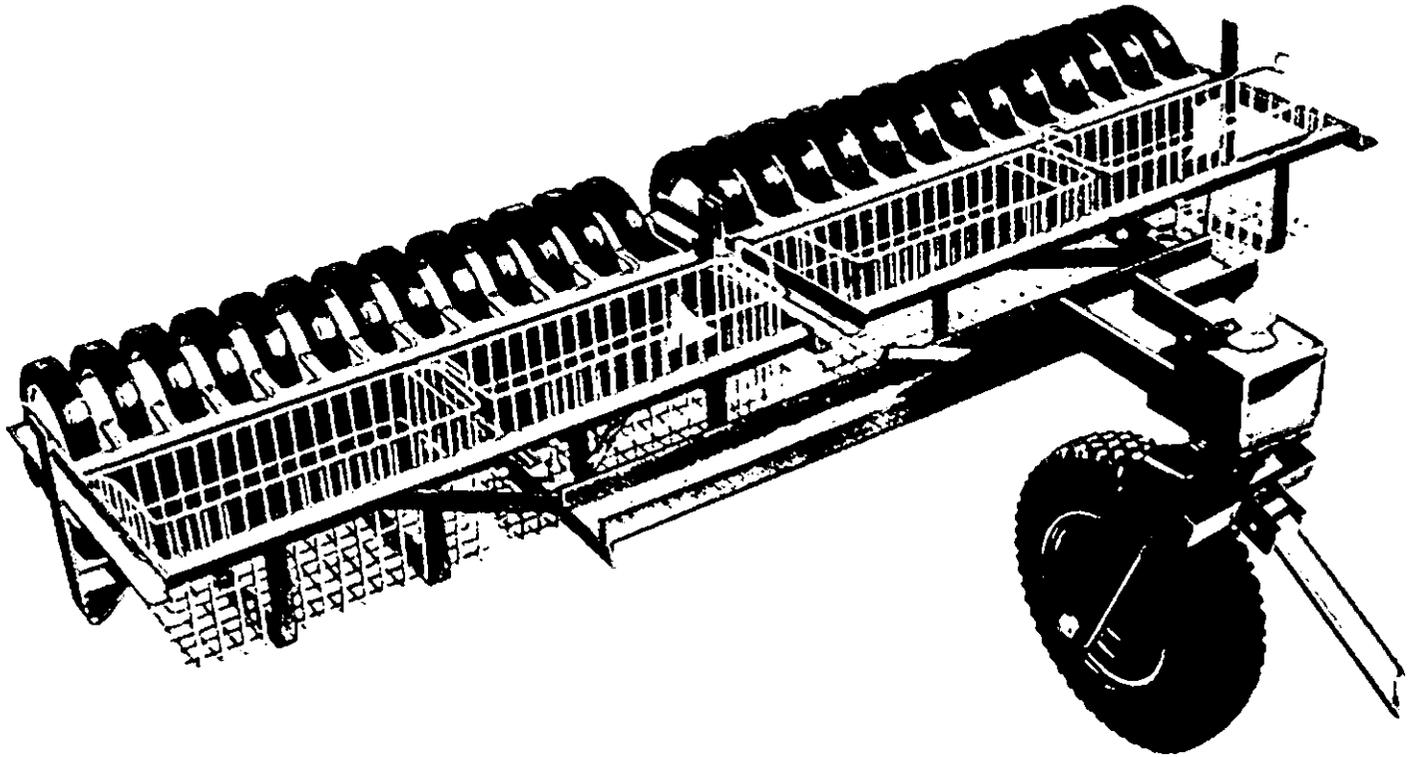

Golf Ball Retriever - Wittek Width from 3½-ft. to 18-ft.
Cushion-wedge "pick-up" assures longer life of ball
dimples, protection against injury. Single-caster, wheel
drawn bar design with 1000-lb. test, 4-ply, pneumatic tire.
Ball guides may be raised or lowered to suit terrain.

WITTEK GOLF RANGE SUPPLY CO., INC.

3650 N. Avondale Ave., Chicago IL 60618 • Telephone (312) 463-2636



Cub Cadet
APPROVED ALLIED EQUIPMENT

ROTARY SWEEPER - JENKINS SWEEPSTER




Rotary Sweeper-Jenkins Sweepster Front-mounted broom is driven off front PTO with V-belt to gearbox. 4-ft. wide, 26-in. diameter. Cleans path 41-in. wide, angles 30° to right. Brush speed top of 150-300 rpm. Long-life bristles of poly-propylene fiber, sectional type. Electric lift raises broom 8 inches. Brush pressure controlled by spring tension. Attaches quickly, securely with tractor quick hitch. Available with manual angle change feature. Order Model No. L4800CC2.

SWEEPSTER JENKINS EQUIPMENT CO., INC.

Dexter, MI 48130 • Telephone (313) 426-3961.



Cub Cadet
APPROVED ALLIED EQUIPMENT

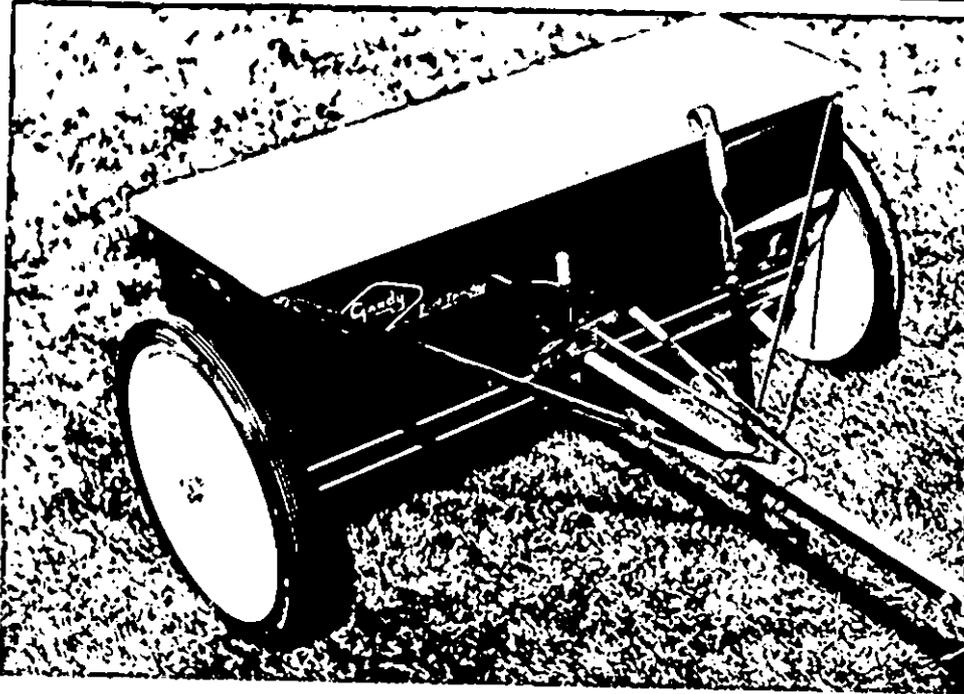

Spreader-Seeder - Gandy The Turf Tender is a precision applicator of dry top dressing, fertilizer, herbicides, and other chemicals. 42" spreading width, large capacity hopper, plus stainless steel rate control slide. Detachable bottom and quick removal rotor mechanism ideal for easy cleaning. Cover additional. Order Model No. 42T20.

Also for use with Cadet Lawn Tractors and Riding Mowers


GANDY COMPANY

528 Gandrud Rd., Owatonna MN 55060; (507) 451-5430

Suburban Trail-N-Spray[®] Power Sprayer. Hitch on to any yard tractor or riding mower. Same as the 42025 Suburban except with a hitch. Especially useful for quick and easy spraying of the entire lawn when equipped with 4995 Turf-Spray Attachment or 4148 Boom. Do your yard spraying from the tractor seat.

42250 Suburban Trail-N-Spray Power Sprayer. Exterior epoxy-coated galvanized steel tank. In carton, 104 lbs.

Suburban power sprayer is manufactured under U.S. Patent 3,018,927

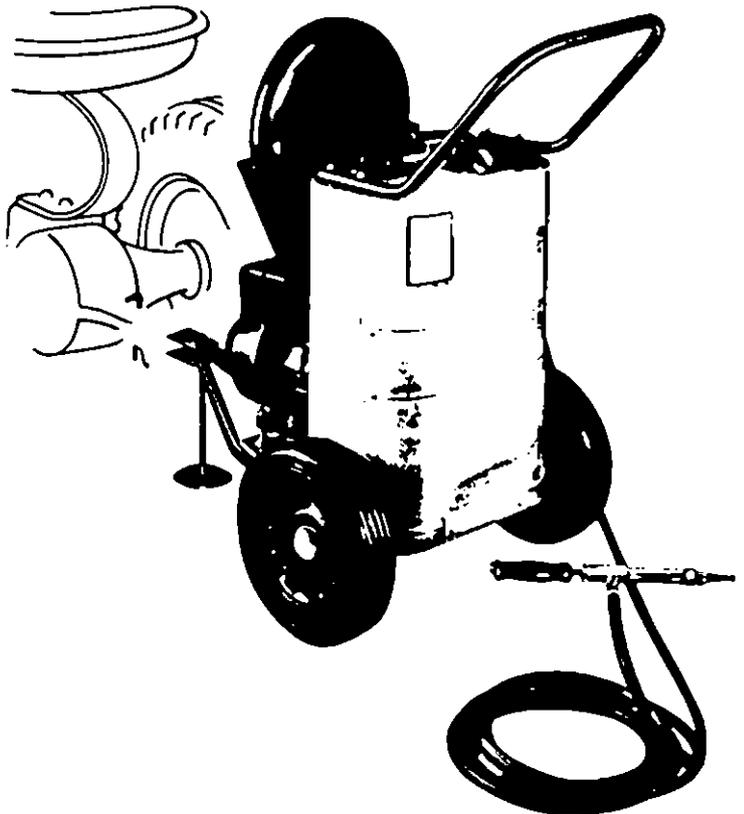

H.D. HUDSON MANUFACTURING CO.

500 N. Michigan Ave., Chicago IL 60611; (312) 644-2830



Cub Cadet

APPROVED ALLIED EQUIPMENT


This Trailer-Type Rake may be drawn in three positions: straight across, or angled to discharge material either to right or left.

Complete unit includes a Flip-Up Grader Blade for permanent attachment. Blade is mounted on Rake, drops easily into working position. When not in use, Blade is raised and locked in carrying position.

PROVIDES A SMOOTH WELL-GROOMED SURFACE

The unit lets you work close to trees, fences, walls, foundations, drives, walks, and flower beds.

It's the practical, modern way to achieve a smoothly-finished, attractive surface in areas such as these: Institutional Grounds, Drives and Trails, Tennis Courts, Bridle Paths, Athletic Fields, Parking Areas, Parks and Playgrounds, Golf Courses, Cemeteries, Cinder Tracks, Baseball Diamonds, Estates.

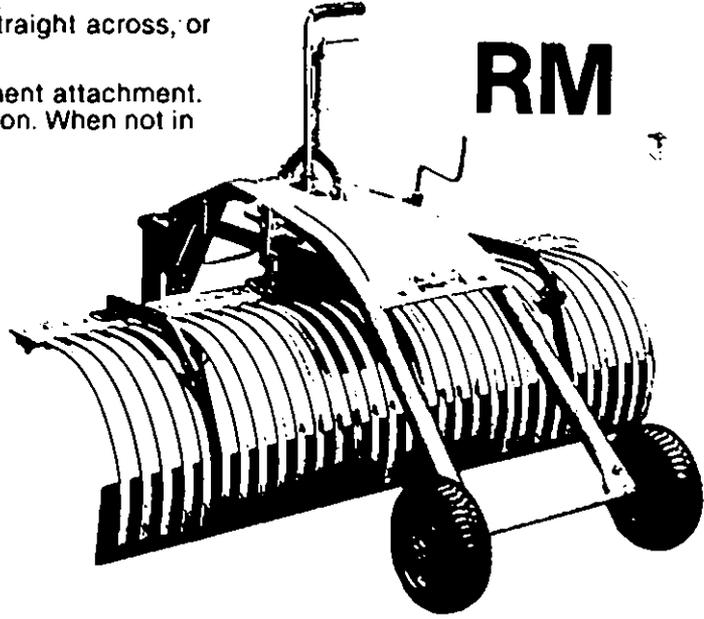

RM

MOST EFFICIENT SOIL-WORKING METHOD


A riding tractor and the Model RO York Rake is a combination that makes short work of tedious soil-working jobs. The six-foot working width enables one man to cover large areas quickly, at less cost than with other methods in use today.

HANDLES A VARIETY OF TASKS

The Model RO Rake with Grader Blade attachment is a versatile tool that performs a wide variety of soil-preparation, landscaping, and maintenance functions... including...


- Grading, leveling and smoothing
- Removal of stones, roots, debris
- Mulching and pulverizing of soil
- Spreading of topsoil quickly and evenly
- Distributing crushed stone, gravel or cinders
- Preparing large areas for seeding

RO

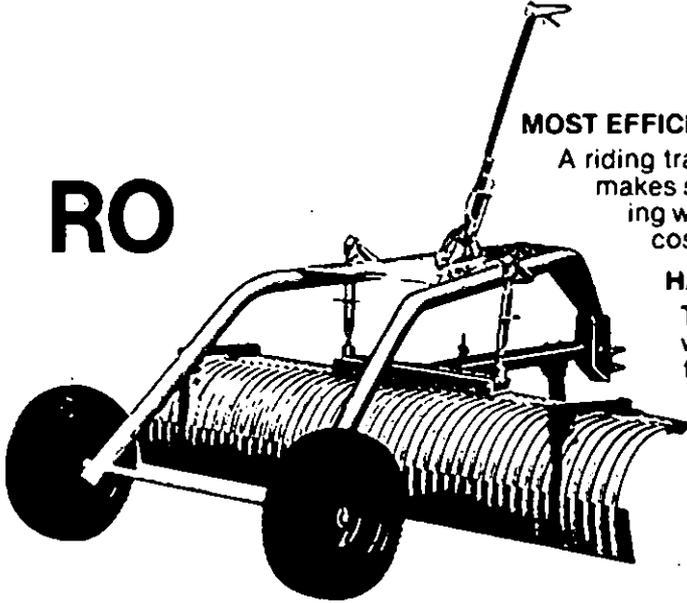

A versatile landscaping work-horse in addition to superior rake-ability, the Model RS is equipped with three major optional attachments, to handle a wide variety of soil-working jobs. Adjustable Caster Wheels to provide precise control of working depth of rake teeth; a Scarifier to rip up the hardest-packed earth; and a rugged steel Grader Blade to match the rake. Both Scarifier and Blade flip up and lock in carrying position when not in use. With the complete Rake Unit you get multi-job capability in performing a broad range of soil-preparation, landscaping and grounds maintenance functions including:

- Spreading topsoil; distributing crushed stone, gravel and cinders
- Ditching and terracing
- Removing twigs, stones, debris
- Breaking up hard-packed earth
- Pulverizing and mulching
- Grading and leveling
- Preparing large areas for seeding

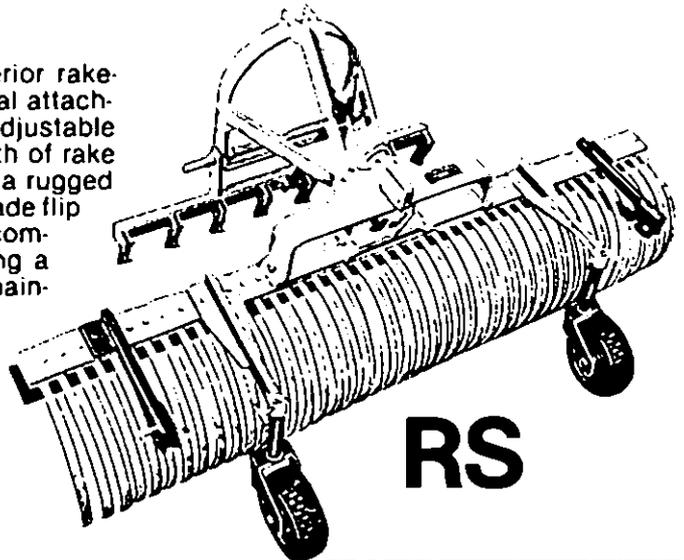

RS

YORK RAKES

A division of YORK MODERN CORPORATION • UNADILLA, N.Y. 13849 • Phone (607) 369-7111

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



Cub Cadet

APPROVED ALLIED EQUIPMENT

"There's a York Rake to match your H.P."

These rugged, versatile attachments are designed specifically for the power capacity of Cub Cadet tractors. With the combination of rake and blade you can perform dozens of soil-preparation, landscaping and maintenance functions, including:

- Removing stones, roots, debris
- Breaking up sod and mulching the soil
- Grading and leveling, filling in low spots
- Spreading topsoil quickly and evenly
- Distributing crushed stone, gravel or cinders.

USES

Estates, Institutional Grounds, Parks and Playgrounds, Drives and Walks of dirt or cinders, Golf Courses, Tennis Courts, Cemeteries, Bridle Paths, Running Tracks of dirt or cinders, Athletic Fields, Baseball Diamonds, Parking Areas.

YORK RAKE MODEL	H.P.	TRACTOR
RM Trailer Type	Under 10	
RO Trailer Type	10 to 20	
RS 3-point hitch Category "0" or "1"	10 to 20	

Selecting the proper YORK RAKE to match your tractor horsepower is important for getting maximum use out of your Rake.

	MAX. WORKING WIDTH	MIN. WORKING WIDTH	WGT.	No. OF TEETH	No. OF RAKE POSITIONS	WHEELS (2)	TYPE HITCH
RM	4'	3'4"	147	31	3	8.25x2.75	Draw Bar
RO	6'	4'8"	302	46	5	16x6.50-8	Draw Bar
RS5'	5'	3'7"	291	38	5	10x3.50 (caster)	3 pt. Cat "0"
6'	6'	4'5"	313	46	5	10x3.50 (caster)	3 pt. Cat "0"

YORK RAKES

A division of YORK MODERN CORPORATION • UNADILLA, N.Y. 13849 • Phone (607) 369-7111

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE




Phone - 1-217-728-4334

303 WEST RAYMOND ST., SULLIVAN, ILLINOIS 61951

Quality and expertise developed over 30 years of manufacturing experience

MODEL NO. 31-0101—10 CU. FT. DUMP TRAILER

SPECIFICATIONS:

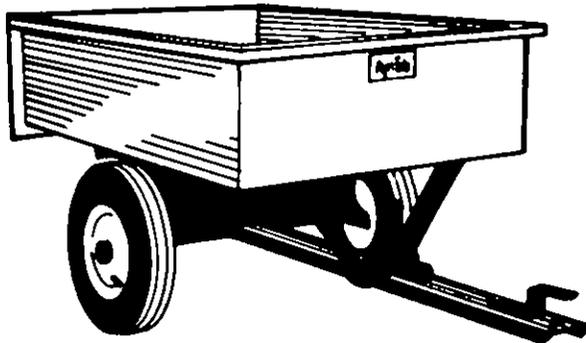


- Bed: 18 ga. steel construction, 30" W; 48" L; 11" H with removable tailgate.
- Tires: 16.00" x 4.00" Pneumatic, Rib Tread
- Axle: 3/4" Dia. Steel
- Capacity: Up to 750 lbs.
- Finish: Baked Enamel—Body: Red; Underframe: Black
- Approx. Sh. Wt.: 122 lbs.
- Carton Size: 13 1/4" H; 33 1/2" W; 51" L

Optional Accessory:

Model No. 31-0102. 11" high Wood Stake Sides Kit

MODEL 31-0171—10 CU. FT. (H.D.) DUMP TRAILER

SPECIFICATIONS:

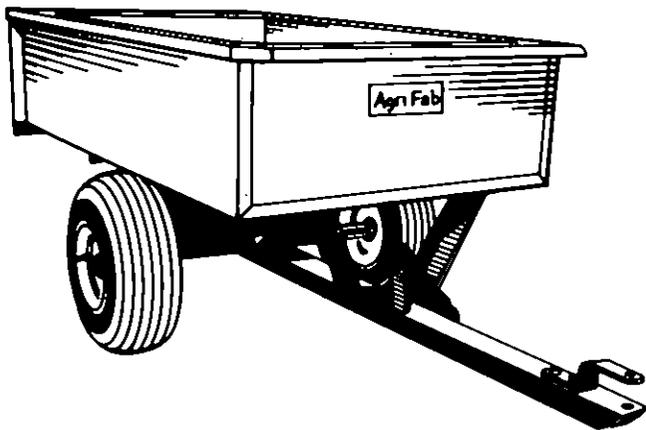


- Bed: 16 ga. steel construction—32 1/2" W; 48" L; 11 1/2" H
Approximate inside dim.—30" x 45 1/4"
- Tailgate: Removable with reinforced guides
- Tires: 16.00" x 6.50" Pneumatic, Turf Tread
- Axle: 1.0" Dia. Steel
- Capacity: Up to 1200 lbs. max.
- Finish: Baked Enamel—Body: Beige; Underframe: Black
- Approx. Sh. Wt.: 145 lbs.
- Carton Size: 13 1/2" H; x 33 1/2" W; x 51" L

Optional Accessory:

Model No. 31-0102. 11" high Wood Stake Sides Kit.

MODEL 31-0175—SUPER "10" DUMP TRAILER

SPECIFICATIONS:

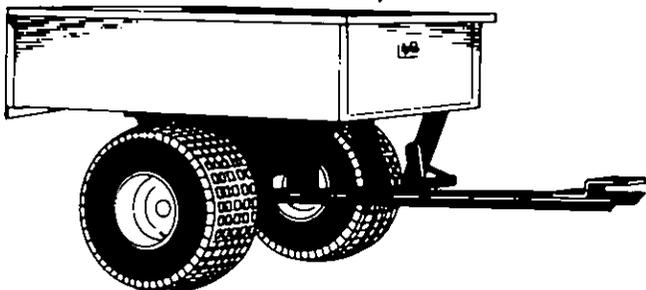


- Bed: 16 ga. steel construction—32 1/2" W; 48" L; 11 1/2" H;
Approx. inside dim.—30" x 45 1/4"
- Tailgate: Removable with reinforced guides
- Tires: 20.0" x 10.0" Pneumatic, Turf Tread
- Axle: 1.0" Dia. Steel
- Capacity: Up to 1500 lbs. max.
- Finish: Baked Enamel—Body: Ivory; Underframe: Black
- Approx. Sh. Wt.: 157 lbs. Total (2 Cartons)
- Carton Size: 13 1/2" H x 33 1/2" W x 51" L (Carton 1 of 2)
- Carton Size: 20 1/2" H x 20 1/2" W x 20 1/2" L (Carton 2 of 2)

Optional Accessory:

Model No. 31-0102. 11" high Wood Stake Sides Kit for 20 cu. ft. capacity



MODEL NO. 31-0125—6.5 CU. FT. DUMP TRAILER

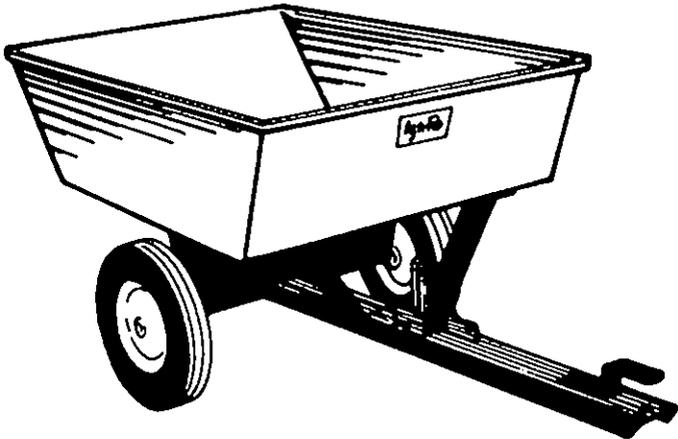

SPECIFICATIONS:


- Bed: 20 ga. steel construction, 28" W; 40" L; 10½" H.
- Tires: 12.00" x 3.00" Semi-pneumatic, Rib Tread
- Axle: ¾" Dia. Steel
- Capacity: Up to 450 lbs.
- Finish: Baked Enamel—Body: Red; Underframe: Black
- Approx. Sh. Wt.: 75 lbs.
- Carton Size: 12" H; 30" W; 42" L

Optional Accessory:

Part No. 43180, Loop type handle designed for easier dumping or converting cart to push-pull type.



MODEL 31-0100

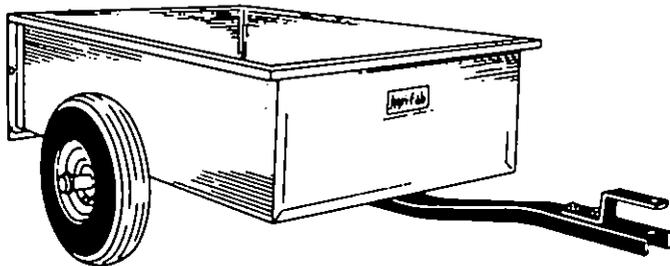


SPECIFICATIONS:

- Bed: 18 ga. steel construction—29" W x 43¼" L x 11½" H; Approx. inside dim.—26¼" x 40¾"
- Tailgate: Removable with reinforced guides
- Tires: 14.00" x 4.00" Pneumatic, Rib Tread
- Axle: 5/8" Dia. Steel
- Capacity: Up to 450 lbs. max.
- Finish: Baked Enamel—Body: Red; Underframe: Black
- Approx. Sh. Wt.: 85 lbs.
- Carton Size: 13½" x 30" x 45½"

MODEL 31-0176 10.0 CU. FT. HAND CART (K.D.)


NOTE: Shown with 12" high wood sides and removable front panel. (Wood Not Furnished.)

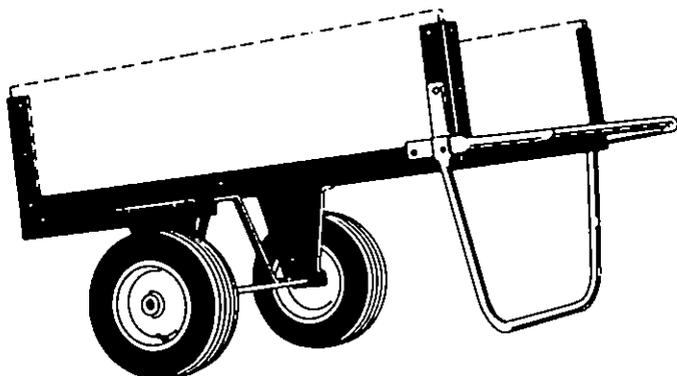

SPECIFICATIONS:

- Bed: 1/8" x 2" x 2" angle; 30" x 48½" bed size
- Tires: 16.00" x 4.00" Pneumatic, Rib Tread
- Axle: ¾" Dia. Steel
- Capacity: Up to 750 lbs.
- Finish: Baked Enamel—Black
- Approx. Sh. Wt.: 63 lbs.


MODEL 31-0102 OPTIONAL STAKE SIDES KIT

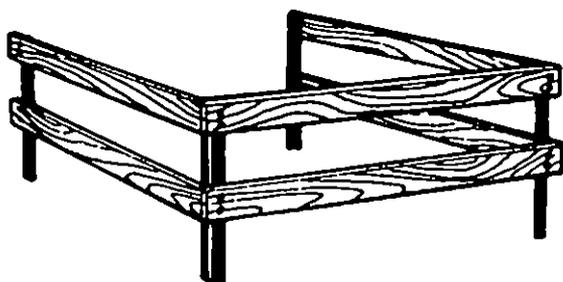

SPECIFICATIONS:

- Brackets:** 10 ga. steel—set of (4) approximately 11" high above cart body.
- Wood:** Pre-drilled ready for assembly.
- Hardware:** All necessary fasteners furnished in kit for simple assembly with common hand tools.
- Used On:** Fits 10 cu. ft. dump trailer models 31-0101, 31-0171, and 31-0175.
- Approx. Sh. Wt.:** 12 lbs.
- Carton Size:** 4" H x 6" W x 48" L

MODEL 31-0165—LAWN AERATOR (PLUG TYPE)

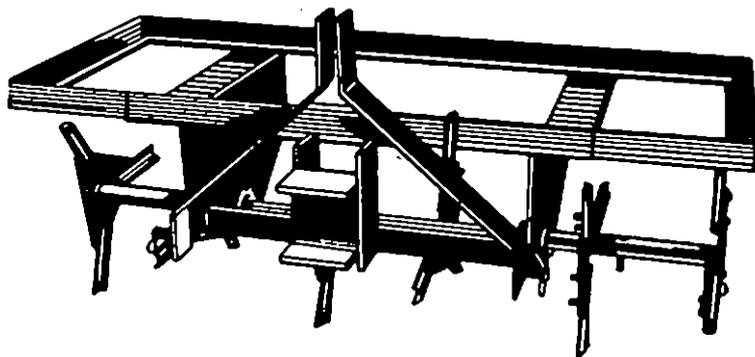


FITS: All Riding Mowers, Lawn Tractors and Garden Tractors with 3 Point (Category "O") or Sleeve Hitch System.

SPECIFICATIONS:

- 18 heat treated steel replaceable coring points mounted on 25 mm diameter axle.
- Up to 3" coring depth, approximately 3/4" diameter hole.
- 40" over-all width (approx.).
- Baked enamel (black) finish.
- Coring points pull plugs from lawn leaving clean cuts holes to absorb moisture, oxygen and fertilizer at the root zone.
- Add concrete, blocks or wheel weights to weight box to increase penetration.
- Approx. Shipping Weight... 85 lbs.
- Approx. Carton Size: 12" x 42" x 17"

MODEL 31-0179 H.D. LAWN ROLLER

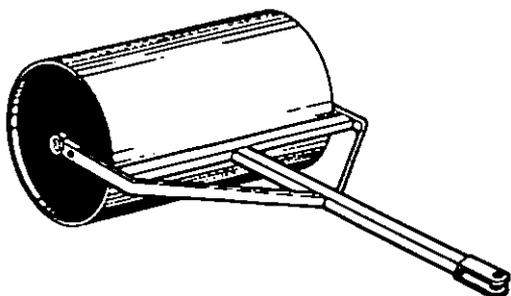

SPECIFICATIONS:



- Roller Drum:** Dia. 24" x 36" W, heavy ga. welded steel
- O.A. Width:** Approx. 39 3/4"
- Bearings:** 1" I.D., Replaceable
- Tow Hitch:** Std. pin type—5/8" hole
- Weight w/Water:** Approx. 640 lbs.
(Note: May be filled with sand)
- Approx. Sh. Wt.:** 110 lbs.



MODEL 31-0180 30" H.D. LAWN SWEEP

SPECIFICATIONS:

- Housing/Frame: Heavy ga. steel construction
 - Hopper/Bag: Replaceable vinyl
 - Handles: 7/8" dia. plated steel tubing w/upper handle ht. adj.
 - Windscreen: Vinyl cover furnished
 - Capacity: Approx. 6 1/2 bu.
 - Brushes: 30" swath w/four large replaceable poly brushes
 - Height of Adj.: Precision brush ht. adj. w/single control knob
 - Tires: Oversize 10" x 2.5" semi-pneumatic
 - Hubcaps: Yes
 - Width O.A.: Approx. 37"
 - Finish: Baked Enamel—Red Hs'e., Black Vinyl Bag, White Rims
- Approx. Sh. Wt.: 55 lbs.

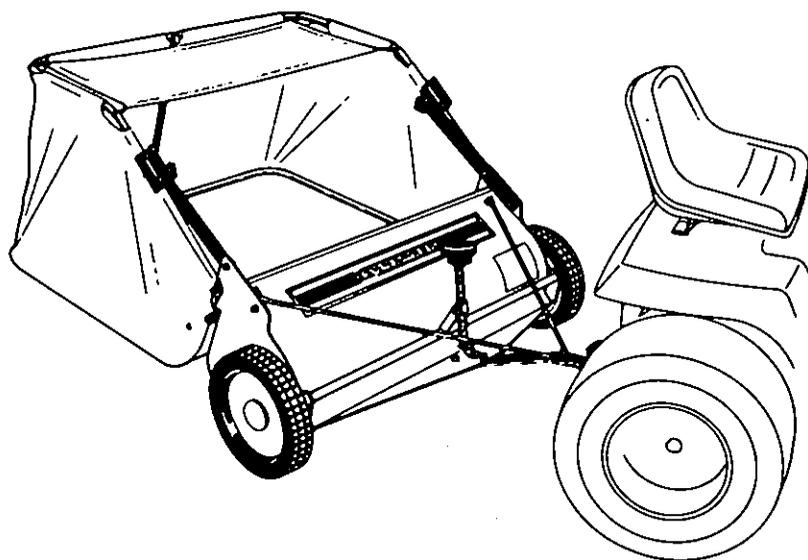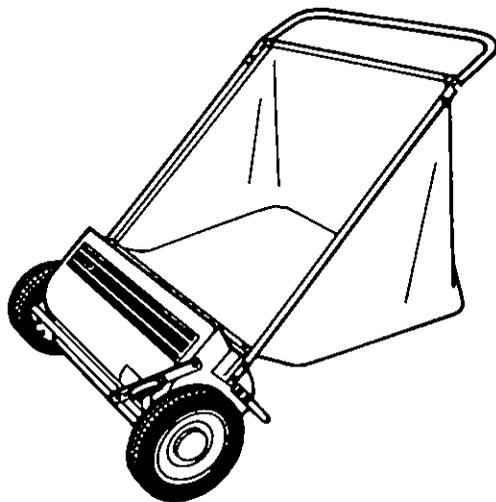

MODEL 31-0172 32" H.D. LAWN SWEEP

SPECIFICATIONS:

- Housing/Frame: Heavy ga. steel construction
 - Hopper: Heavy ga. zinc plated steel tubing frame with replaceable vinyl cover
 - Windscreen: Vinyl cover furnished
 - Capacity: Approx. 14 bu.
 - Brushes: 32" swath with four large replaceable poly brushes
 - Height of Adj.: Precision brush height adjustment with single control knob
 - Tires: Oversized 10" x 2.5" semi-pneumatic
 - Hubcaps: None
 - Width O.A.: Approx. 39"
 - Finish: Baked Enamel—Red Hs'e., Black Tow Bar and Vinyl Hopper, White Rims
- Approx. Sh. Wt.: 87 lbs.



MODEL 31-0173 38" H.D. LAWN SWEEP

SPECIFICATIONS:


- Housing/Frame: Heavy ga. steel construction
 - Hopper: Heavy ga. zinc plated steel tubing frame with replaceable vinyl cover
 - Windscreen: Vinyl cover furnished
 - Capacity: Approx. 19 bu.
 - Brushes: 38" swath with four large replaceable poly brushes
 - Height of Adj.: Precision brush height adjustment with single control knob
 - Tires: Oversize 10" x 2.5" semi-pneumatic
 - Hubcaps: Yes—Zinc plated steel
 - Width O.A.: Approx. 45"
 - Finish: Baked Enamel—Red Hs'e., Black Tow Bar and Vinyl Hopper, White Rims
- Approx. Sh. Wt.: 105 lbs.

Attachments...To Make Your Tiller More Productive


Model 31-0144 — "V"-Bar Cultivating Kit

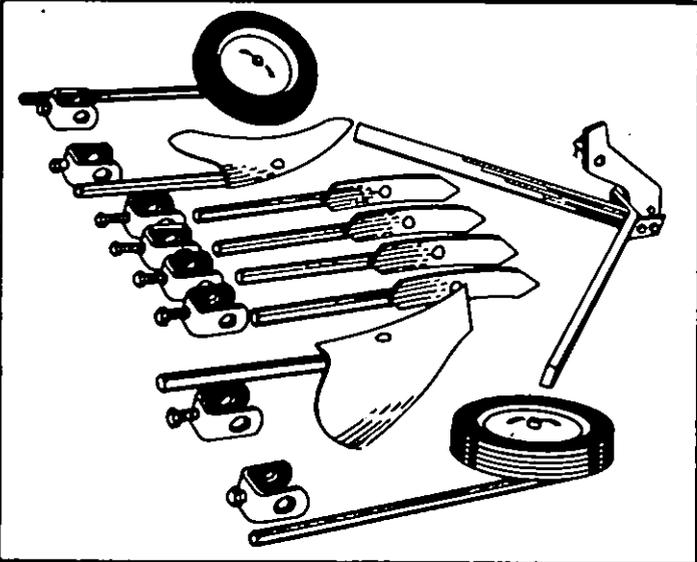

"V" Bar Frame




4 Shovel Cultivator
w/Depth Gauge Wheels
on "V" Bar Frame

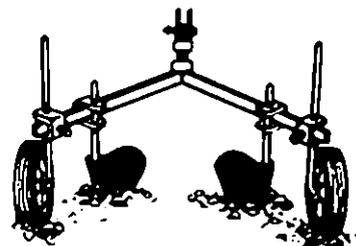


Hiller/Furrower
w/Depth Gauge Wheels
on "V" Bar Frame


Model 31-0145 — Depth Stake Cultivating Kit

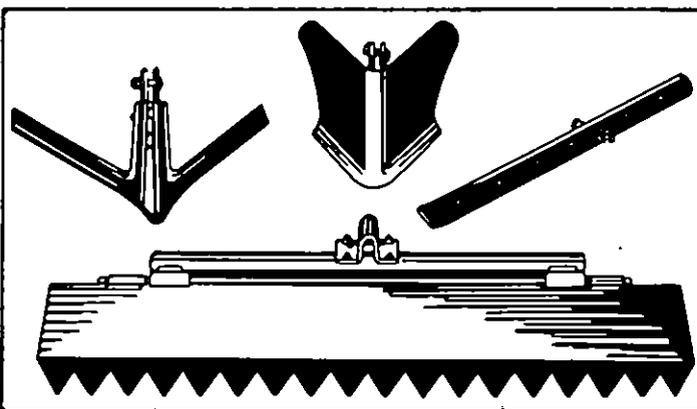

8" Furrow Opener




32" Leveling Rake



15" Sweep Plow


Model 31-0183 — Til-Row®

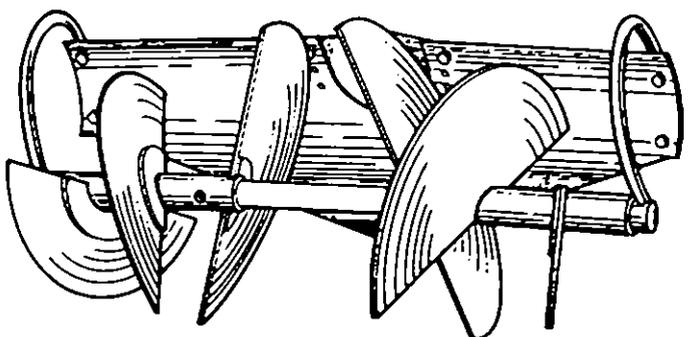

Tillage tools designed for the beginner or professional. Put your tiller to work with these easy to use attachments.

HEAVY DUTY GARDEN TILLER


Attachments...To Make Your Tiller More Productive




MODEL 31-0107—
6-Tine Spring Tooth
Cultivator. MODEL
31-0106 Optional Depth
Gauge Wheels shown.




MODEL 31-0110—
8" Furrow Opener.
Mounts on Depth
Stake. Opens rows for
planting.




MODEL 31-0111—
15" Sweep for inner-
row weeding. Mounts
on Depth Stake.




MODEL 31-0113—Tire
Kit... converts tiller to
garden tractor.
(13 x 5.00-6 Pneumatic)
Note: Fits 1" Dia. Tine Shaft.

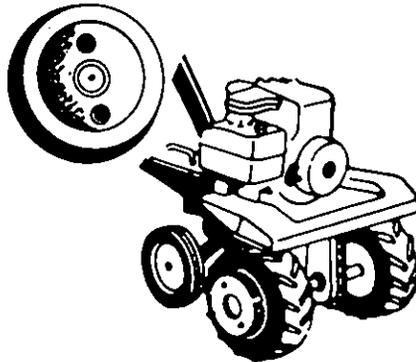

MODEL 31-0114—Wheel
Weights. For extra trac-
tion and stability. (Fits
#31-0113 Tire Kit and
Lawn Aerator #31-0123)
Note: Approx. 20 lbs. weight
each.




MODEL 31-0115—
Chain Kit. For extra
traction... especially in
snow with Snow Blade.
Note: Fits 13 x 5.00-6 tires.



MODEL 31-0116—
32" Leveling/Snow Blade
(Pneumatic traction tires
31-0113, required to mount
blade on std. tillers.)
(MODEL 31-0121—Hitch Bracket
required for "MTD" Rear Tine
Tillers.)




MODEL 31-0119—Tine
Cultivating Shields.
Note: Fits 1" Dia. Tine Shaft.

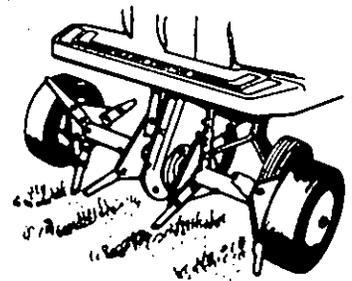

MODEL 31-0123—Lawn
Aerator. (Plug Type) Shown
with 31-0114 Wheel Weights.
for added penetration.
Note: Fits 1" Dia. Tine Shaft.



Model No. 31-0163
Stake Sides Bracket Kit
 (Set of 4 Steel Brackets Only)

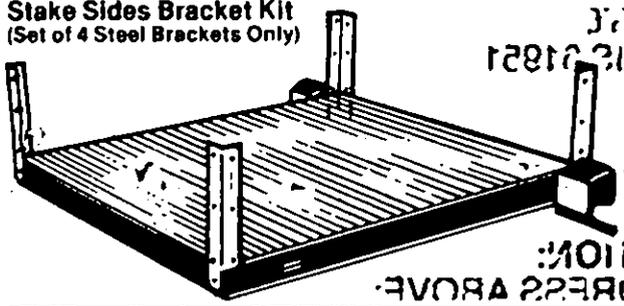


SPECIFICATIONS: (Fits Both Trailers, #31-0157 and #31-0158)

- Heavy 10 ga. formed steel brackets—black enamel finish. (Hardware furnished for mounting to trailer.)
- Brackets extend approximately 12" above trailer frame.
- Plywood flat bed and wood box bed, shown above, not furnished.
- Approximate shipping weight—10 lbs.
- Approximate carton size—4" W; x 4" H; x 16" L.

SEND TO THE ADDRESS ABOVE FOR ADDITIONAL INFORMATION.

Model No. 31-0164
Spare Tire Kit

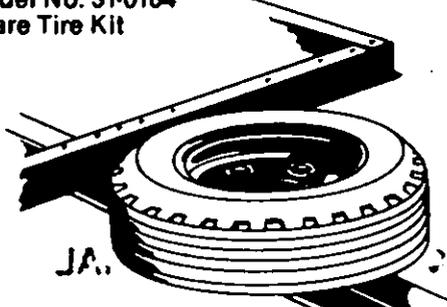


SPECIFICATIONS: (Fits Both Trailers, #31-0157 and #31-0158)

- Demountable 4.80/4.00-8.00 "Tubless Tire Load Range"
- Hardware for mounting furnished.
- Approximate shipping weight—13 lbs.
- Bulk ship—no carton.


AGRI-FAB ATTACHMENTS—1 YEAR—HOMEOWNERS' WARRANTY
 CARGO TRAILERS AND ACCESSORIES

Model No. 31-0169 Flat Bed Hardware Kit SPECIFICATIONS FOR DO-IT-YOURSELF FLAT BED:

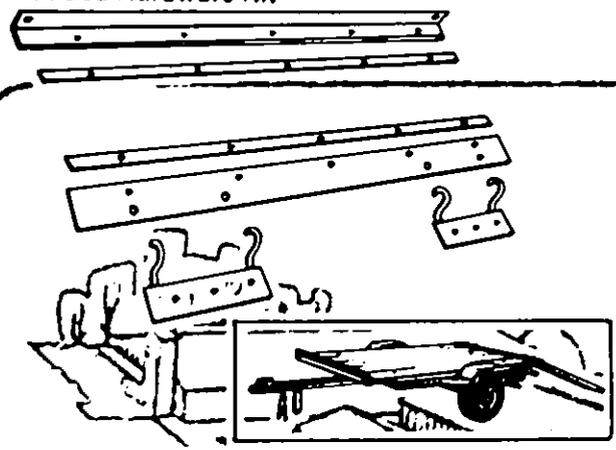

- Recommended wood materials to purchase.
 Bed—5 pieces 2" x 10" up to 72" long.
 Ramps—2 pieces 2" x 10" x 60" minimum.
- Position board planks on trailer chassis between fenders with a maximum over-hang of 12" to front of chassis. If boards are 72" long, the over-hang would be 12" front and rear.
- Note: Depending on width of boards, it may be necessary to cut down width of center board or notch outside boards around fenders.
- Recess or countersink clearance holes in board to provide flush fit on trailer chassis.
- Assemble board planks to trailer chassis and ramp brackets with hardware furnished in kit.
- Approximate shipping weight—25 lbs.
- Approximate carton size—3 1/2" x 6" x 47"

Model No. 31-0162
Lawn Tractor Rails (Pr.)

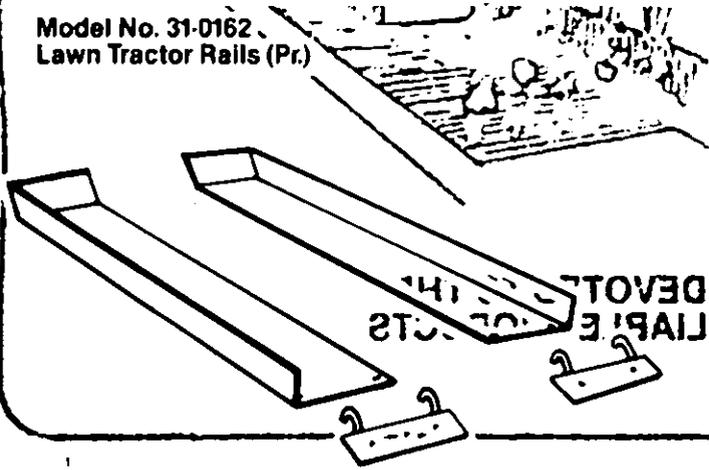

SPECIFICATIONS: (Fits Only Model #31-0157 Trailer)

- Heavy 12 ga. formed steel rails—black enamel finish. (Hardware furnished for mounting to trailer.)
- Flanges on outside—approximately 2" high.
- Front stop angle—approximately 2" high.
- Overall length—approx. 62" flat portion.
- Ramp width—9 1/2" (inside edge to outer flange).
- Ramp brackets and hardware for assembly to wood or steel included. Wood ramps shown are not furnished.
- Note: Recommended ramp length is 2" x 10" x 60" long. See caution note.
- Hold down straps for transporting not furnished.
- Do not use on One Wheel Trailer, Model 31-0158, and do not overload trailer, Model 31-0157.

Approximate shipping weight—48 lbs.
 Bulk ship—no carton.




CAR-GO

Trailers
and Accessories

Let's you "take it along"...for
family fun...sports...work...farm.

"The Heavyweights"

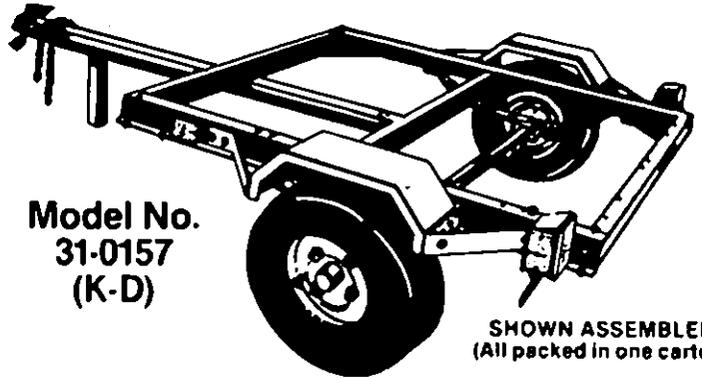

Model No.
31-0157
(K-D)

SHOWN ASSEMBLED
(All packed in one carton)

**1/2 TON CAPACITY—
—YEAR ROUND VERSATILITY**

Specifications:

- "GTW" (Gross Trailer Weight)—1180 lbs.—black enamel finish
- 44" wide x 48" long frame—10 ga. steel—approx. 48" between fenders
- Overall length approx. 85," including hitch coupler
- Overall width approx. 59½," including fenders
- Leaf spring wheel suspension—heat treated—heavy duty full double leaf
- Oversize welded tube axle
- 1.0" tapered roller bearings in hi-speed wheel hubs (factory assembled and greased)
- Demountable 4.80/4.00-8" tubeless tire—load range "B"
- Fenders and fender guard brackets
- Hitch tongue stand with locking position, up or down
- Class I hitch coupler—for 1-7/8" ball
- Class I safety chains
- Taillights and clearance lights (D.O.T. Approved)
- Wiring harness, including trunk to trailer wires
- Approximate shipping weight: 180 lbs.
- Approximate carton dimensions: 60" x 17½" x 8¾"

Optional Accessories:

- 31-0160—Cycle rail—single
- 31-0161—Cycle loading ramp
- 31-0163—Stake sides bracket kit (set of 4)
- 31-0164—Spare tire kit
- 31-0169—Flat bed hardware kit

Ordering Information:


SEND ORDERS TO: AGRI-FAB, INC.
303 W. RAYMOND ST.
SULLIVAN, ILLINOIS 61951

INFORMATION REQUIRED:
MODEL NUMBER • DESCRIPTION • QUANTITY

REQUEST FOR ADDITIONAL INFORMATION:
SEND TO THE ADDRESS ABOVE;
ATTENTION: MILTON M. HARSHMAN

Limited Warranty

- AGRI-FAB ATTACHMENTS—
1 YEAR—HOMEOWNER/90 DAYS COMMERCIAL
- “CAR-GO TRAILERS AND ACCESSORIES
180 DAYS—HOMEOWNER/90 DAYS COMMERCIAL
COMPLETE COPY OF LIMITED WARRANTY AVAILABLE ON REQUEST.

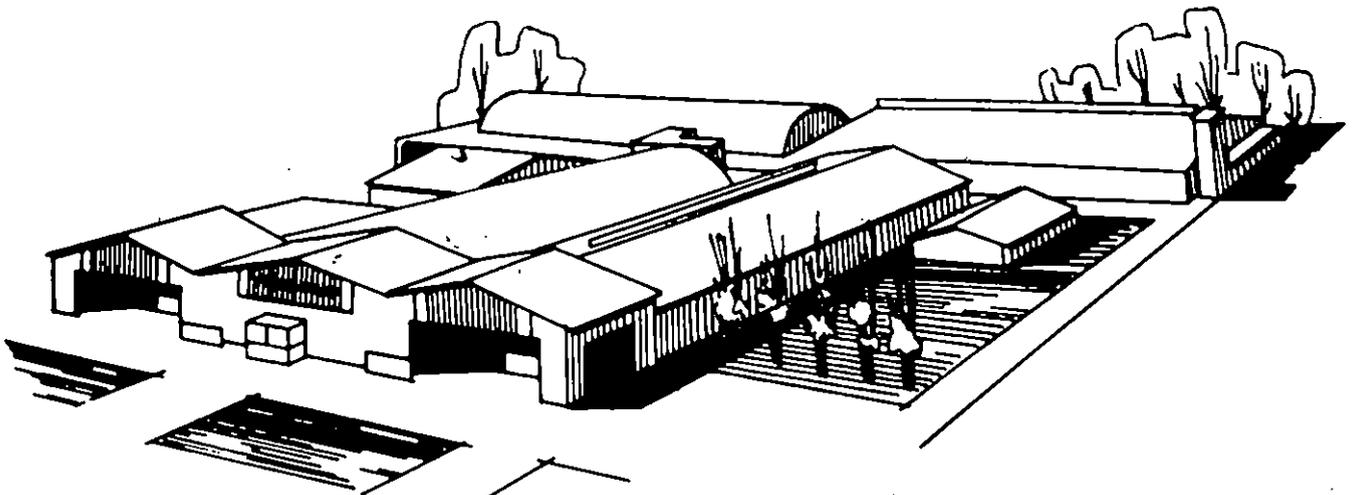

**A MODERN FACILITY DEVOTED TO THE
MANUFACTURE OF RELIABLE PRODUCTS**