


Haban[®]

ROTARY MOWERS



Designed and built for International 244 & 254 Tractors



MODEL 254 INTERNATIONAL HARVESTER TRACTOR WITH 616-IH61 61" CUT MOWER-REAR PTO DRIVE.



HABAN "616-IH61" ROTARY MOWERS FEATURE THREE HIGH LIFT BLADES WITH UNIQUE WIND TUNNEL FOR FINISH CUT MOWING-FRONT AND REAR, ANTI-SCALP ROLLERS STANDARD EQUIPMENT, FOR SMOOTH MOWING.

HABAN MID-MOUNT FINISHING CUT MOWERS FOR INTERNATIONAL 244 & 254 TRACTORS

The HABAN 616-IH61 series of finishing cut mowers were designed specifically for International Harvester tractors. HABAN mowers feature a free floating suspension, plus front and rear anti-scalp turf rollers, plus four adjustable gauge wheels to allow the mower to follow ground contours easily.

HABAN 616-IH61 mowers fit both two-wheel drive and four-wheel drive International Harvester 244 & 254 tractors with a variety of tire options including the 13.6-16 wide tread turf tires! (Tire options may vary depending on tractor model.)

Three heat treated high lift blades provide suction to stand the grass up so that your lawn grass is cut smoothly and evenly. The heavy duty, deep deck design, with its extra deep wind tunnel discharge, spreads the cut material in a broad pattern, through the side discharge chute, giving you a smooth finished cut lawn.

The mower is easily raised and lowered hydraulically with the tractor three-point lift control. You can quickly change height of cut without tools by adjusting the gauge wheels in 1/2" (12.7 mm) increments.

Special heavy duty Kevelar cord v-belt drives are used on all Haban mid-mount mowers and are spring loaded for maximum v-belt performance. HABAN mowers are tough and built for long life, with greasable blade spindle shafts and precision ground ball bearings.

The HABAN Mid-Mount Mowers provide you with professional mowing results at reasonable cost. Easy on-easy off, they give you the flexibility to easily use your International Harvester tractor for many other chores as well.

The HABAN 616-IH61 Mower and your choice of International Harvester Model 244 or 254 series tractors makes an ideal mowing combination and makes quick work of your mowing jobs. You will be pleased with the results, year after year.

HABAN - a recognized leader in quality equipment, made in our own plants, for over 30 years.

(Specifications and design subject to change without notice.)

Printed in U.S.A.

Specifications

MID-MOUNT MOWERS FOR INTERNATIONAL 244 AND 254 SERIES TRACTORS

WIDTH OF CUT

616-IH61 61" (1550 mm) Cut Models available for IH-244 & IH-254 Tractors with REAR PTO Drive.

CUTTING HEIGHT & GROUND CLEARANCE

Cutting height easily adjusted without tools in 1/2" (12.7 mm) increments from 1 1/4" (31.88 mm) to 3 3/4" (95.25 mm).

Ground Clearance in transport position ranges from 4" (101.6 mm) to 5 1/2" (140 mm) depending on tractor models and tire options.

NUMBER OF BLADE SPINDLES

Three - Heat treated spindles, rotating in precision ground ball bearings, for long life. Regreaseable.

BLADE OVERLAP

1" (25.4 mm) to avoid skipping, heat treated blades - high lift design, enclosed in deck housing.

BLADE LENGTH - 21" (53.34 mm)

GAUGE WHEELS - (4)

Easily adjusted for height of cut. Grease fittings for long life.

BLADE TIP SPEED

Haban Mowers for International Harvester tractors are designed to operate at best efficiency from 15,000 to 17,500 FPM blade tip speed at engine speeds of 2450 RPM to a maximum of 2750 RPM.

MOWER DECK

7 gauge (3/16" thick) heavy duty steel mower deck with unique wind tunnel design and side discharge for smooth mowing.

BLADE SPINDLE BELT DRIVE

Single "B" Section Heavy Duty V-Belt, spring loaded - Requires no adjustment.

TYPE OF PTO DRIVE

"B" Section Heavy Duty, Rear PTO V-Belt Drive (Spring Loaded).

METHOD OF INSTALLATION OR REMOVAL


After initial setup, unit can be removed without tools. Simply remove mounting pins, then back tractor over mower. No tugging or heavy lifting!

SHIPPING WEIGHT - 490 lbs.

COLOR - Haban Ivory

WARRANTY - 12 Month Limited Warranty

The complete line of HABAN Mowers also includes a selection of rear mount mowers

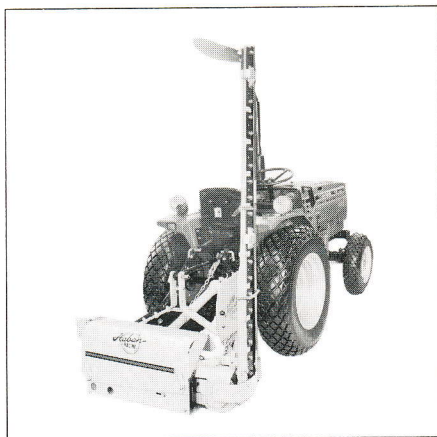


HABAN Model 440 Rear Mount Sickle Bar Mowers are available in 4 ft. (122 cm) and 5 ft. (152 cm) cutting sizes. Perfect for mowing hay, weeds - on ditch banks and hard-to-get-at places. Equipped with the new style plug-proof shear finger guards, grass board, counter balanced lift and breakaway. Hydraulic lift system for raising and lowering mower.

Model 444-540-AH - 48" (122 cm) Cut
Model 445-540-AH - 60" (152 cm) Cut



HABAN Model 620 Series Rear Mount Finishing Cut Rotary Mowers - for fine lawn mowing, are available in 54" (137 cm) and 60" (152 cm) cut models and feature three high lift, heat treated blades for smooth performance. Blade spindle housings and caster wheels are greaseable. All models feature unique wind tunnel discharge. HABAN, the rear mount finishing cut rotary mowers you can buy with confidence.

Model 54RM-D - 54" (137 cm) Cut
Model 60RM-D1 - 60" (152 cm) Cut

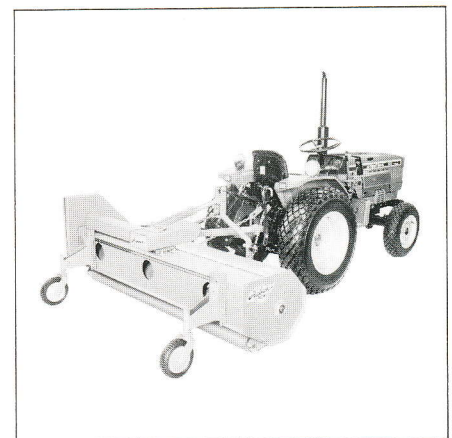

HABAN Model 520 Rear Mount Flail Mowers - for the tougher mowing jobs. The principle of the HABAN flail mower combines the best qualities of rotary and reel mowers. Pivot mounted flail knives cut tall weeds and grass, yet mow lawns well. Available in 4 ft. (122 cm) and 5 ft. (152 cm) cutting sizes. Model 520-540 - 48" (122 cm) Cut
Model 522-540 - 60" (152 cm) Cut

It's the Dependability of HABAN Products that Makes Them Great.

HABAN MANUFACTURING COMPANY

2100 Northwestern Avenue
Racine, WI 53404
Phone 414-637-8388

Sold by